



TRAXX SC32 GRINDER

The Traxx SC32 was designed with a focus on the operator. This is demonstrated by the ergonomic handle design, ease of use, and advanced features that provide real time feedback to the operator.

The machine features cast alloy components along with a floating shroud, designed for years of durability and dust free operation. The SC32 is equipped with a new tool head for better balance, new tool support and a new electrical cabinet with an improved cooling system that is sealed to protect the electrical components from heat and dust. The 370 mm wheels and quick release make it easy to operate and manoeuvre the machine manually.

From allowing the operator to be more productive on the job site to reduced down time for repairs and maintenance, the SC32 will help your business run faster – this is grinding in the fast lane for real.

The SC32 is also available with a Propane Tank.



Technical Data	SC32	SC32 Propane
Power	15 kW	18.5 kW
Current	32 Amp	32 Amp
Voltage Propane Tank	200-240 V / 400-480 V	9 Kg
Frequency	50 - 60 Hz	50 - 60 Hz
Weight	630 Kg	600 Kg
Grinding Speed	230 - 825 RPM	300 - 575 RPM
Grinding width	800mm	800mm
Grinding discs	3 x 300mm	3 x 300mm
Water Tank	20 Litres	20 Litres



SC32 PROPANE

TRAXX COMBIFLEX
SC1000RC GRINDER

Is a robust and stable machine, made entirely of steel. The 1000 mm grinding foot print is perfect for large commercial applications where high productivity is necessary.

The Traxx Combiflex 1000RC has combined the strength required of the grinding method, coupled with possibilities to grind at higher speeds allowing more weight on the machine. This is possible due to the six grinding discs rotating anti-clockwise, while attached to a large plate that rotates in the opposite direction.

It is equipped with a patented operating system that enables a stable and smooth grinding.

The radio-controlled machine provides a minimal load and no vibration for the operator while the grinding capacity of the number of square meters per hour increases dramatically. The built-in battery backup for the drive wheels makes it easy when loading and unloading, the battery is automatically loaded up as soon as the machine is connected to electrical main. To make your work even easier you can mount an extra front wheel to be used when you move, load and



Technical Data	
Voltage	380 - 480 V 3~
Power	15 kW
Current	32 Amp
Frequency	50 - 60Hz
Weight	700 kg
Grinding Speed	300-950 RPM
Grinding Width	1000mm
Grinding Discs	6 x 240mm
Radio Frequency	Bluetooth
Battery Remote Control	Li-ion



TRAXX COMBIFLEX
SC800 GRINDER

The Traxx Combiflex SC800 is a robust and stable machine made of steel, designed for high productivity in large areas. The SC800 offers 800mm of grinding power combined with 380kg of weight, making it the perfect machine for commercial applications where you need a high capacity grinder. SC800 is equipped with our patented drive system, which gives the machine a stable and smooth grinding process.

The ergonomic design also reduces vibrations for the operator, and enables the machine to produce consistent results with minimal effort from the operator. The SC800 offers 800mm of grinding power combined with 400kg of weight, making it the perfect machine for large commercial applications. The SC800 also uses a very high disc to drum ratio, which results in each grinding head turning at a very rapid RPM. This allows the SC800 to polish extremely well, and increases the performance of each grinding head.



Technical Data	
Voltage	400 V 3~
Power	11 kW
Current	32 Amp
Frequency	50 - 60 Hz
Weight	380kg
Grinding Speed	500 - 1400 RPM
Grinding width	800mm
Grinding Discs	3 x 240mm

TRAXX COMBIFLEX
SC800RC GRINDER

The Traxx SC800RC is a robust and stable machine made of steel, designed for high productivity in both small and large areas. The 800mm grinding foot print is perfect for commercial applications where compact size is important, As the SC800RC is controlled by radio control, the machine handle can be folded down allowing the machine to work well in smaller spaces.

SC800RC is equipped with a patented drive system that enables stable and smooth grinding. The SC800RC has three rotating grinding discs that rotate in the opposite direction relative to how the gear housing is mounted. Resulting in grinding and polishing the floor surface at a higher speed while minimising lateral movements.

The truly unique feature of the SC800RC is the Bluetooth radio control system it uses for controlling motion and grinding speed. The heavy-duty remote control unit allows the operator to move the machine with a joystick in any direction, and with precision in tight areas. You can also choose your speed and activate the “cruise control” for easier handling.

A radio-controlled machine provides a minimal load and no vibration for the operator while the grinding capacity of the number of square meters per hour increases dramatically. The built-in battery backup for the drive wheels makes it easy when loading and unloading.



Technical Data	
Voltage	400 V 3~
Power	11 kW
Current	32 Amp
Frequency	50 - 60 Hz
Weight	460kg
Grinding Speed	500-1100 RPM
Grinding width	800mm
Grinding Discs	3 x 240mm
Radio Frequency	Bluetooth
Battery Remote	Li-Ion

TRAXX COMBIFLEX
PROPANE SC800 GRINDER

The Traxx SC800 PROPANE is a robust and stable machine that is constructed to be operated without any power supply. It is powered 100% by propane gas, which makes it very flexible in many areas.

SC800 PROPANE is great for outdoor applications where there is limited or no power options. Of course you can also use the machine indoors, with good ventilation. With its weight and motor power the SC800 PROPANE is a powerful and efficient machine. The machine is equipped with a 22 litre water tank. The water tank binds the dust that occurs while working.

The ergonomic design reduces vibration and stress injuries to the operator and the machine can grind and polish at high speeds. SC800 PROPANE is also designed to follow the ground for effective and consistent performance.



Technical Data	
Power	18.5 kW
Propane tank	9 kg
Grinding Speed	600 - 960 RPM
Grinding discs	3 x 240 mm
Grinding width	800 mm
Weight	440 kg
Water tank	22 Litres

TRAXX COMBIFLEX
SC800DSP GRINDER

The Traxx SC800DSP is the optimal helper for each operator. The machine will guide you through the entire grinding process through the integrated computer positioned on the machine’s control panel.

By the guiding system on the panel the machine operator gets, via the sensors, feedback and warnings when the tool wear is too much or is completely worn out. The sensors continuously measure the wear and thickness of the tools to guide the operator to optimal consumption.

SC800DSP is a robust and stable machine built entirely of steel, designed for commercial projects. SC800DSP is equipped with our patented drive system to power the three grinding heads. The drive system is constructed with high quality components like a double-sided toothed belt in combination with a ring gear.

Technical Data	
Voltage	400 V 3~
Power	11 kW
Current	32 Amp
Frequency	50 - 60 Hz
Weight	380kg
Grinding Speed	500 - 1100 RPM
Grinding width	800mm
Grinding Discs	3 x 240mm



TRAXX COMBIFLEX
SC700RC GRINDER

The Traxx SC700RC is a robust and stable machine made of steel, designed for high productivity in both small and large areas. The 700 mm grinding footprint is perfect for commercial applications where compact size is important as the SC700RC is controlled by the radio control the machine handle can be folded down and then the machine works well even in smaller spaces.

SC700RC is equipped with a patented drive system that enables stable and smooth grinding. It has three rotating grinding discs that rotate in the opposite direction relative to how the gear housing is mounted. This results in grinding and polishing the floor surface at a higher speed while minimising lateral movements and becomes easy for the operator to manoeuvre.

The truly unique feature of the SC700RC is the Bluetooth radio control system it uses for controlling motion and grinding speed. The heavy-duty remote control unit allows the operator to move the machine with a joystick in any direction, and with precision in tight areas. You can also choose your speed and activate the “cruise control” for easier handling.

A radio-controlled machine provides a minimal load and no vibration for the operator while the grinding capacity of the number of square meters per hour increases dramatically. The built-in battery backup for the drive wheels makes it easy when loading and unloading.

TRAXX COMBIFLEX
SC650 GRINDER

The Traxx Combiflex 650 is a robust and stable machine made of steel, designed for both residential and commercial projects with its grinding width of 650mm. The SC650 uses a patented planetary system to drive its three heads. This patented system uses a double-sided cog belt. The components are carefully chosen to ensure a safe dependable operation and high quality.

SC650 is extremely durable and easy to maintain. The design helps to reduce the torque and stress on the operator. With the SC650 there is also the option for wet grinding by using the water connection.

Technical Data	
Power	7.5 KW
Voltage	400 V 3~
Current	16 Amp
Frequency	50 - 60 Hz
Weight	470 Kg
Grinding Speed	250 - 950 RPM
Grinding width	700 mm
Grinding discs	3 x 240mm
Batteries Remote	Li-Ion
Radio frequency	Bluetooth




Technical Data	
Power	7.5 kW
Current	16 Amp
Voltage	400 V 3~
Frequency	50 - 60 Hz
Weight	320 Kg
Grinding Speed	350 - 1100 RPM
Grinding width	650mm
Grinding discs	3 x 210mm



TRAXX COMBIFLEX
SC650 PROPANE GRINDER

The Traxx SC650 PROPANE is a robust and stable machine, designed to be operated 100% from propane, which makes it very flexible and with many different areas of application. It is great for outdoor applications where there are limited power options. Of course you can also use the machine indoors, with good ventilation. The machine is equipped with a 22 litre water tank to make it easier if the power supply is limited. The water tank binds the dust that occurs while working.

The ergonomic design allows the machine to grind and polish at higher speeds, while at the same time minimise side torque and stress on the operator. It also reduces vibrations for the operator, and enables the machine to produce consistent results with minimal effort. With the 650mm grinding width the SC650 PROPANE is perfect for smaller residential jobs as well as the bigger commercial jobs.

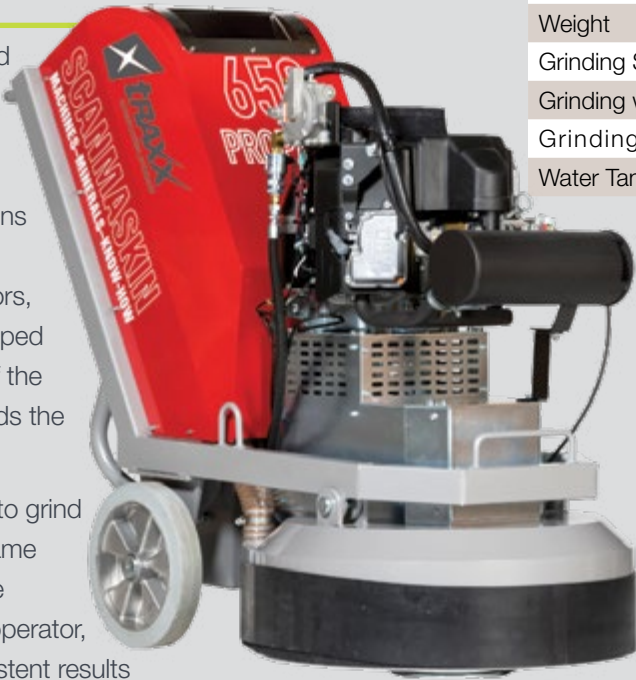

Technical Data	
Power	13.2 kW
Propane Tank	9 Kg
Weight	382 Kg
Grinding Speed	600 - 960 RPM
Grinding width	650mm
Grinding discs	3 x 210mm
Water Tank	22 Litres

TRAXX COMBIFLEX
SC650DSP GRINDER

The Traxx SC650DSP is the optimal helper for each operator. The machine will guide you through the entire grinding process through the integrated computer positioned on the machine's control panel.

By the guiding system on the panel the machine operator gets, via the sensors, feedback and warnings when the tool wear is too high or is completely worn out. The sensors continuously measure the wear and thickness of the tools to guide the operator to optimal consumption.

SC650DSP is a robust and stable machine built entirely of steel, designed for commercial projects. SC650DSP is equipped with a patented drive system to power the three grinding heads. The drive system is constructed with high quality components like a double-sided toothed belt in combination with a ring gear. The components are carefully selected to ensure high reliability and high quality.



Technical Data	
Power	7.5 KW
Voltage	400 V 3~
Current	16 Amp
Frequency	50 - 60 Hz
Weight	320Kg
Grinding Speed	350 - 1100 RPM
Grinding width	650 mm
Grinding discs	3 x 210mm

TRAXX COMBIFLEX
SC500PD GRINDER

The Traxx Combiflex SC500PD comes with a built-in water tank for wet grinding. This takes away the problem with external water supply. It is an efficient and strong machine for use when grinding concrete, stone and terrazzo. You can also use it for renovating, removing coatings and remove impurities from the surface.

For the SC500PD there is a large variety of grinding, polishing, scratch tools and sandpapers for different surfaces and conditions.

The SC500PD features 100% steel construction, along with our patented flex head system for reduced vibration and smooth operation on rough surfaces. This construction gives a reliable machine with minimal maintenance. As standard, the SC 500 PD is equipped with adjustable speed, this makes the machine work very well on all types of surfaces, such as concrete, stone and terrazzo.



Technical Data	
Power	4 kW
Current	16 Amp
Voltage	400 V 3~
Frequency	50 - 60Hz
Weight	160kg
Grinding Speed	250 - 1150 RPM
Grinding width	500mm
Grinding discs	3 x 150mm
Water Tank	18 Litres

TRAXX COMBIFLEX
SC500i GRINDER

The Traxx Combiflex 500i is a highly effective and powerful machine in contrary to its compact size. The machine has a high reliability and is easy to get started with and simple to operate and maneuver.

It is a robust and strong machine for use when grinding concrete and stone. You can also use it for renovating, removing coatings and remove impurities from the surface.

There is a large variety of grinding, polishing, scratch tools and sandpapers for different surfaces and conditions.

The SC500i features 100% steel construction, along with our patented flex head system for reduced vibration and smooth operation on rough surfaces.

This construction gives a reliable machine with minimal maintenance.



Technical Data	
Power	4 kW
Current	16 Amp
Voltage	400 V 3~
Frequency	50 - 60Hz
Weight	150kg
Grinding Speed	950 RPM
Grinding width	500mm
Grinding discs	3 x 150mm

TRAXX COMBIFLEX
SC450NS GRINDER

The Traxx Combiflex 450NS also combines the small size with big grinding power and high efficiency. The SC450NS comes standard with a built-in water tank for wet grinding which makes the machine suitable for grinding of terrazzo and eliminates the need for an external water source.

SC450NS is flexible, easy to use and suitable for both the rental market and smaller renovation business. The SC450NS also features variable speed, which is crucial for certain grinding and polishing applications along with coating removal.

The construction of the SC450NS is very robust and stable and made of steel. This makes the machine very durable and stable to operate. The construction with spring-steel flex heads reduces the vibrations and allows the machine to grind rough surfaces with minimal effort.



Technical Data	
Power	2.2 kW
Current	12 Amp
Voltage	230 V 1~
Frequency	50 - 60 Hz
Weight	125 kg
Grinding Speed	500 - 1050 RPM
Grinding width	450 mm
Grinding discs	3 x 150mm
Water Tank	18 Litres




TRAXX COMBIFLEX
SC450 GRINDER

The Traxx Combiflex 450 is the first model in a new generation of floor grinders, which combines a small footprint with high productivity. It is a versatile grinder for both aggressive and fine grinding of concrete and natural stone surfaces and also very effective in removing impurities, like paint and carpet residues.

SC450 is a flexible and easy to use grinding machine perfect for the rental market and smaller renovating business. Although the machine is light it still has a robust and stable construction made of steel, which makes it very durable and steady to operate. The construction with spring-steel flex heads reduces the vibrations and allows the machine to grind rough surfaces with minimal effort.



Technical Data	
Power	1.5 kW
Current	20 Amp
Voltage	110 V 1~
Frequency	50 - 60 Hz
Weight	90 kg
Grinding Speed	875 RPM
Grinding width	450 mm
Grinding discs	3 x 150mm

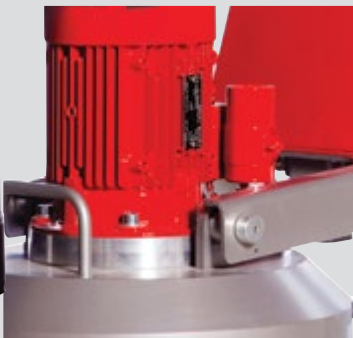

TRAXX COMBIFLEX
SC330 EDGE GRINDER

The Traxx Combiflex SC330 is two machines in one. The SC330 features a single 330mm grinding disc that works great for grinding small areas, removing tough coatings, and general surface preparation.

The SC330 can also be configured as a single disc edger by adjusting the axle in two different directions. This unique system allows the SC330 to be angled towards the edge, which results in extremely clean and effective grind along edges. Making the SC330 one of the best options for grinding and polishing edges, since it eliminates the need for hand held grinders.

The SC330 can easily be separated into two different modules for easy and convenient transportation. This can literally be accomplished in less than 15 seconds.



Technical Data	
Power	1.5 kW
Current	20 or 10 Amp
Voltage	110-120 V 1~ 220-240 V 1~
Frequency	50 - 60 Hz
Weight	65 kg
Grinding Speed	600 or 750 RPM
Grinding width	330 mm
Grinding discs	1 x 330mm

TRAXX COMBIFLEX
SC18 GRINDER

With the Traxx Combiflex18 you can grind and smooth old, painted and damaged wood flooring as well as new ones, and it works equally well when grinding plank flooring as parquet floors.

The SC18 grinds and sands really close to the wall, thanks to its size, which results in extremely clean and effective grinds along edges. If the skirting boards are removed before grinding, the need for a hand held grinder is eliminated.

Equipped with adjustable speed so you can adjust your speed to the type of surface you're grinding which is often crucial when sanding wooden floors.

There are a large number of tools and sandpapers in different grits that can mount onto the machine with velcro holders.

The SC18 can easily be separated into two different modules for easy and convenient transportation, and makes it an extremely attractive option for limited space requirements.



Technical Data	
Power	1.1 or 2.2 kW
Voltage	110-120V 1~ or 220-240V 1~
Frequency	50 / 60Hz
Weight	95kg
Motor	5.4 HP
Grinding width	450mm
Grinding discs	3 x 150mm
Grinding Speed	200-500 or 300-750 RPM

TRAXX COMBICLEAN SC380

Easy to handle combi machine that gets the work done. Flexible, robust and ergonomic!

A compact machine that absorbs even in sharp narrow bends since the suction unit smoothly follows the movement of the machine. The handle can be folded to a height that suits you, which makes the machine easy to operate in cramped areas.

A screw head made of rustproof steel makes the machine impact resistant. A high pressure from the brush gives a perfectly clean result.



Technical Data	
Work width	38cm
Clean/waste water	14L / 16L
Work time:	1.2 hours
Weight	59 Kg
Dimensions	750 x 470 x 1030 mm

ELECTRIC TROWEL AND BATTERY TROWEL

Battery driven Trowel machine for epoxy-based coatings for floors with coloured granules, and floor coverings of natural stone.

Electric power float for epoxy-based coatings for floors with coloured granules, and floor coverings made of natural stone.



Technical Data	
Power	0.2 kW
Electric Voltage	1 x 230 V or 1 x 110 V
Battery Voltage	24 V
Weight	14 kg
Speed	Variable up to 170 rpm.
Work Width	475 mm
Dimensions	500 x 1000 x 500 mm

TRAXX COMBIFLEX HANDYMAN

The Traxx Combiflex Handyman is a heavy-duty hand grinder designed for grinding edges and corners that are difficult to grind with a larger machine. The SC Handyman has a grinding width of 125mm.



Technical Data	
Power	1.53 Watt
Voltage	230 V 1~
Frequency	50 Hz
Weight	4.7kg
Grinding diam	125mm
RPM	3400-8000/min

G125 CONCRETE GRINDER

The G125 is a variable speed 125mm, high endurance concrete grinder with excellent dust control.

- Robust 2200W universal motor with constant speed electronics for an even finish.
- Variable speed for different applications
- Load warning lamp optimises grinding efficiency with overload and overheat warnings
- Adjustable ergonomic front handle and tool-free sliding cover are perfect for edge grinding.
- Effective dust control skirt with spring suspension and replaceable brush

[Buy G125 Grinder Here](#)

Technical Data	
Power Input	2200W (220V) 1700W (110V)
No Load	4300 - 7200 min ⁻¹
Wheel Diameter	125mm
Arbor	22.23mm & 25.4
Spindle	M14 or 5/8-11
Dimensions	500 x 195 x 175 mm
Weight	4.7 Kg

BG125 & BG5 HIGH FREQUENCY GRINDERS

The BG125 and BG5 are 125mm concrete grinders with a super efficient, high frequency brushless motor for long life and long duty cycles. Powered by the P4000 Power Converter

- 2200W brushless permanent magnet synchronous motor for outstanding power and efficiency.
- Load warning lamp for optimising grinding efficiency with overload and overheat warning
- Adjustable ergonomic front handle for edge grinding.
- Effective dust control skirt with spring suspension and replaceable brush

[Buy BG125 High Frequency Grinder Here](#)

[Buy BG5 High Frequency Grinder Here](#)

Technical Data	BG125	BG5
Power Input	3~ 2200W	3~ 2200W
No Load	3850 - 5800 min ⁻¹	3850 - 5800 min ⁻¹
Wheel Diameter	125mm	125mm
Arbor	22.23mm & 25.4	22.23mm & 25.4
Spindle	M14 or 5/8-11	M14 or 5/8-11
Dimensions	455 x 200 x 175 mm	235 x 290 x 235 mm
Weight	4.6 Kg	5.1 Kg

P4K POWER CONVERTER

The P4K Power Converter has special circuitry that allows it to accept single phase and convert it into 3 phase, high frequency to control the motor. The converter can preset various speeds for different applications and has a built-in PRCD that has full electronic protection for over and under voltage, thermal and current overload.

[Buy P4000 Power Converter Here](#)



Technical Data	P4000
Power Input	100V-240V 50-60Hz
Max Power Input	1~ 4500W
Max Power Output	3~4000W
Weight	3.1 Kg

TRAXX SC480 GRINDER

The Traxx SC480, single phase concrete grinding machine is a 3 head model that will accept all TRAXXLok diamond tools and comes complete with hour meter, amp meter and load readout as standard. A true workhorse for the Surface preparation industry.

Features:

- LED Display
- Lifting hook
- Dust Shroud
- Horizontal Adjustment
- Additional Weights - 22 Kg
- Adjustable Handle with 5 different Positions

Technical Data	
Motor	2.2 kW Single Phase
Voltage	220 V/50Hz 110V/60Hz
Grinding Width	480 mm
Grinding Discs	3 x 180 mm
Grinding Speed	380 RPM
Production Rate	50 - 75 m2/H
Dimensions	545 x 1450 x 1005 mm
Weight	160 Kg



TRAXX SC250X GRINDER

Is the perfect all round start up or rental machine for grinding, polishing or stock removal. The SC250X accepts TraxxLok or full discs.

Foldable Handle has a range from 60" to 165". This makes the products structure more compact and convenient in transportation and storage, and easy to handle and operate.

Electrical Protector is a safety switch that protects the electrical equipment by immediately disconnecting the power supply when the current exceeds the range.

The Detachable Dust Shroud allows the grinder to get close to walls when grinding.

The Level Bubble allows the user to quickly check whether the grinder is in a level state or not.

Vacuum Cleaner Port and Water Pipe port is designed for dry and wet grinding. In dry grinding it can connect with a vacuum cleaner to keep the working environment clean. In wet grinding it can be connected with a water pipe to cool the grinding head and absorb the dust.

[Buy the Traxx SC250X Grinder Here](#)

Technical Data	
Motor	3 Hp
Motor kW rating	2.2 kW
Motor rpm	1410
Weight	48kg
Plate Type	Standard 250mm plate or Cub Shoe
Plate Bolt Types	M12 x 25 Countersunk socket head
Main Construction	Powder Coated Steel



MC8 SCARIFYING MACHINE

Perfect for heavy stock removal on uneven or undulating surfaces. A full range of star cutters and accessories are available. The MC8 Scarifying machine can be used for Path repairs, Coating removal, Floor preparation or cleaning, Creating non-slip surface, Traffic marking removal, Concrete joints, Surface grinding.

FEATURES


- Adjustable cutting depth
- Strong handle
- Front mounted lifting handles for easy transportation
- Anti-vibration mounts for operator comfort
- Powder coated finish
- Dust control outlet
- Easy-control engine stop switch
- Sealed quality bearing ensures longer life

[Buy MC8 Scarifying Machine Here](#)

Technical Data	MC8-4	MC8-E
Engine Type	Petrol, Honda	Electric Motor
Power kW	4.2	2.2kw Single Phase
Working Width mm	200	200
Weight	62kg	42kg



MC8 CAGE ASSEMBLIES

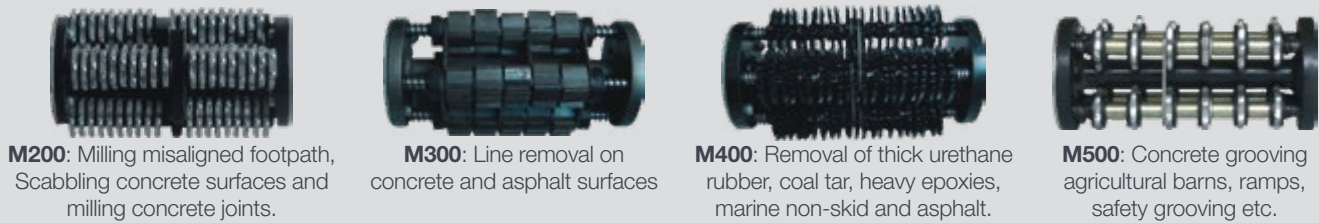


MC10 SCARIFYING MACHINE

For heavy stock removal on uneven or undulating surfaces. A full range of star cutters and accessories are available. The MC10 Scarifying machine can be used for Path repairs, Coating removal, Floor preparation or cleaning, Creating non-slip surface, Traffic marking removal, Concrete joints, Surface grinding.

FEATURES

- Adjustable cutting depth
- Front mounted lifting handles for easy transportation
- Anti-vibration mounts for operator comfort
- Powder coated finish
- Dust control outlet
- Easy-control engine stop switch
- Sealed quality bearing ensures longer life

Technical Data	MC10	MC10-E
Motor	Petrol	Electric Motor
Power	13 hp	7.5 kW
Working Width	250 mm	250 mm
Working depth	0-5 mm	0-5 mm
Speed	2900 RPM	2900 RPM
Weight	162 Kg	170 Kg
Dimensions	1000x500x1050 mm	1000x500x1050 mm

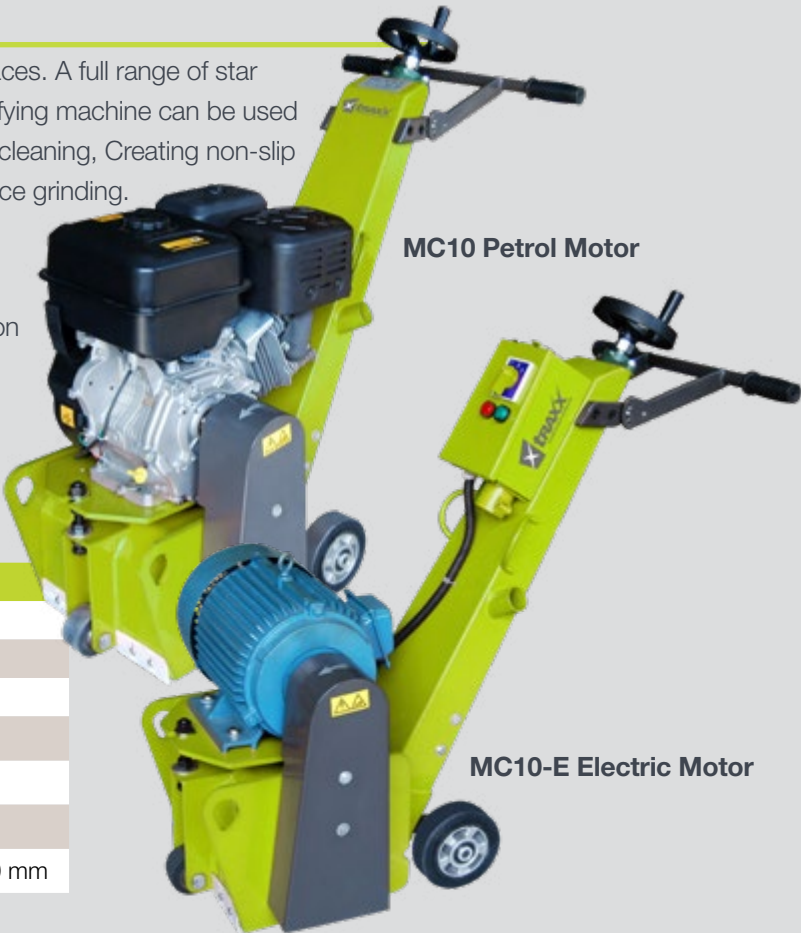

EP5LFB STONE GRINDER

The EP5LFB is a wet/dry stone grinder. Ideal for grinding and polishing stone. The machine is light and comfortable to handle. The speed is adjustable by the thumb wheel to suit the needs of different materials and the electronic constant speed maintains an even speed under all loads. This even working speed is the secret to a superior finish which professionals demand. Equipped with electronic speed control with constant speed which automatically and rigidly maintains even speed and boosts the motor's rated output.

FEATURES

- Quick change conversion to wet or dry
- Quick release water hose coupling
- Vacuum port
- Spindle lock
- Diamond plate
- Hoop and loop plate for diamond polishing

[Buy the EP5LFB Stone Grinder Here](#)



Technical Data	
Power input	1200 W
Voltage	110-120V~ 50-60Hz, 220-240V~ 50-60Hz
No load r.p.m.	2100 - 4300 -1 min
Spindle	M14
Max. Disc diameter	125 mm
Dimensions	303 x 72 x 80 mm
Net Weight	2.8 Kgs

EP7FB STONE GRINDER

The EP7FB is a wet stone grinder. Ideal for grinding and polishing stone. The machine is light and comfortable to handle. The speed is adjustable by the thumb wheel to suit the needs of different materials and the electronic constant speed maintains an even speed under all loads. This even working speed is the secret to a superior finish which professionals demand.

FEATURES

- Quick-release water hose coupling
- Spindle lock
- Professional grade with overload protection and soft-start
- Vacuum port
- Diamond plate with thread
- Hoop and loop plate for Diamond polishing

[Buy EP7FB Stone Grinder Here](#)



Technical Data	
Power input	2200 W
Voltage	110-120V~ 50-60Hz, 220-240V~ 50-60Hz
No load r.p.m.	1000-2400 min -1
Spindle	M14
Max. Disc diameter	180 mm
Dimensions	500 x 210 x 200 mm
Net Weight	6 Kgs

TRAXX HFG-3018 3 HEADED GRINDER

The HFG-3018 will allow you to polish, grind, or clean a variety of surfaces up to 5 times faster than a single head polisher. It is designed to be used with a diamond polishing system, coated abrasive, diamond wheels, or brusher-a true workhorse for all of your polishing needs. For use on counter tops, floors, walls, and stairs.

- Ratio for output and input speed is 1:5
- Industry cleaner interface
- Planetary wheels with top torque
- Ratio for single wheel and input speed is 1:1

Technical Data	
Voltage/Frequency	230-240 V ~50Hz
Polishing Disc Diameter	127mm
No Load Speed	700-3000 RPM
Power	800 W
Weight	3.6 Kg

SM125 SCOURING MACHINE

Versatile for removal of soft plaster surfaces; elastic protection on walls and floors; foam crests and adhesive remainders; asphalt and protective coatings for concrete; latex or oil paint on gypsum surfaces; and removal of impurities and contamination on concrete surfaces. Superior at grinding off irregularities and projections on plaster flooring and roughing, cleaning and smoothing out irregularities of aged concrete. Movable rubber base platform that bends and swivels according to the surface -putting less strain on the user's wrists. Ergonomically designed to decrease user fatigue. Side handle (able to attach to either side of the machine) improves handling of machine. Dust free operation- attaches directly to standard vacuum hose. All three types of abrasive materials, carbide cutter discs, diamond cup grinding heads and TC grinding heads are easily replaced when worn out.

[Buy the SM125 Scoring Machine Here](#)



Technical Data	
Voltage	110-120V~ 50-60Hz, 220-240V~ 50-60Hz
Power input	1200 W
No load r.p.m.	2800
Milling head	125mm
Milling depth	1-6mm
Net weight	5.4kgs

LG125 LONG REACH DIAMOND GRINDER

The 125mm diamond cup wheel capacity Long-Reach Diamond Grinder is only 3.8 kg but boast a motor that is very powerful at 1200W with feedback electronic speed stabilization.

- It is extremely light in weight at only 3.8 kg for fatigue-free operation. Although it is light, the motor is very powerful at 1200W with feedback electronic speed stabilization. This allows the same speed to be maintained, no matter the load.
- It is very easy to control and almost all of the dust and debris are controlled by the vacuum system. This saves time and trouble in cleanup.
- The operation is the most comfortable possible, whether grinding floors from a standing position or grinding walls or ceilings without scaffolding or ladders. Huge amounts of both time and effort are saved.

[Buy the LG125 Long Reach Diamond Grinder Here](#)

Technical Data	
Power Input	1200 W
Voltage	110-120V~ 50-60Hz, 220-240V~ 50-60Hz
No load r.p.m	1700-3500
Length	1475 mm
Max Capacity	125 mm
Arbor	22.23 mm
Net weight	3.8 kgs

BH92 ROTARY BUSH HAMMER

The specialised tool for roughening smooth stone surfaces. Perfect for creating non-slip strips on stone stairs. This Rotary Bush hammer is designed for texturing and roughening of smooth stone surfaces. This is especially important for performing operations to create anti-slip surfaces on stone floors and steps. The parallel guide allows the creation of perfectly straight lines. There are different mounting positions for the Bush hammer Roll Tool Holders to create different working widths. The 1200 W motor is equipped with variable full wave electronic constant speed for an even texture. No matter the load, the motor keeps the same even speed. Effective and convenient dust extraction system for a healthy and mess-free job. Includes a bayonet adaptor end to allow connection to your vacuum cleaner hose. Comfortable handles help keep vibration away from the hands.

[Buy the BH92 BushHammer Here](#)



Technical Data	
Power input	1200 W
Voltage	110-120V~ 50-60Hz, 220-240V~ 50-60Hz
No Load rpm	1600-3200
Bush Hammering ø	51, 70, 96 or 116mm
Max. cutting depth	2.5mm
Net weight	4.8kgs



ULTRA PRO SERIES BMG-2200

The BMG-2200 is a large scale ride-on floor grinding machine, designed for large horizontal surfaces. With two drive wheels fitted to the front and a swivel castor to the back, making the machine very maneuverable both on and off job sites. The three powerful BMG-780PRO grinding heads produce maximum coverage and effective distribution of grinding pressure on each individual head. This means each grinding head can be operated individually. The BMG-2200 also has variable grinding pressure which makes it perfectly suitable for every job site. It is designed with an integrated powerful dust collecting system with HEPA 14 filters, which makes the BMG-2200 virtually dust free according to OSHA regulations.

- Easy operation with forward and backward driving joysticks, cruise control option while the touchscreen provides feedback signals.
- The integrated dust collector system is equipped with a HEPA 14 filter system.
- Lifting and lowering of the grinding heads is done by an innovative pneumatic system. Meaning all heads are able to have more or less grinding pressure.
- Equipped with a maintenance/emergency power supply. When connecting 3 phase power supply with at least 16A, all functions will work, except the grinding heads and dust collector.



Technical Data	
Total Power	62kW 3x460 V 60Hz 125A Single Phase
Working Speed	400-1200 RPM
Working Width	Ø 2200mm (9 x Ø240MM)
Weight	3035 Kg
Dimensions	3450 x 2250 x 1990 mm
Drive System	Ride on (0-24 m/min)
Filter	Automatic pulse cleaning Hepa 14 Filter



BG-180EC FLOOR GRINDER

The BG-180EC is a single disc floor grinder specifically designed for edge and corner grinding applications. It allows operators to process corners and edges whilst in a standing position, allowing for a more comfortable easier and faster work time. Perfect for concrete, stone, asphalt and elastic materials.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for 'aggressive' grinding.
- Connect to a dust collector for a dust free, safe working environment.
- Compatible with a wide range of diamond grinding tools, so it can be used for a range of flooring applications.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.



Technical Data	
Motor	2.2kW 230V 50Hz 16A Single Phase
	1.5kW 110V 50/60Hz 32A Single Phase
Working Speed	2200 RPM
Working Width	Ø 180mm
Weight	60 Kg
Dimensions	1315 x 432 x 1010 mm
Drive System	Manual
Working Direction	Push

BGS-250/BGS-250A FLOOR GRINDER

The BGS-250 is a single-disc concrete grinder specially designed for small to medium horizontal surface preparation applications. It has an adjustable grinding depth and is operational friendly and comfortable to use with low vibrations. Perfect for concrete, stone, asphalt and elastic materials. The BGS-250A is a single-disc concrete grinder Ideal for asbestos removal or lead paint removal.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for 'aggressive' grinding.
- Connect to a dust collector for a dust free, safe working environment.
- Compatible with a wide range of diamond grinding tools, so it can be used for a range of flooring applications.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.



Technical Data	
Motor	2.2kW 230V 50Hz 16A Single Phase
	1.2kW 110V 50Hz 32A Single Phase
Working Speed	1440 RPM (230V) 800 RPM (110V)
Working Width	Ø 250mm
Weight	70 Kg
Dimensions	1180 x 520 x 1120 mm
Drive System	Manual
Working Direction	Push



BGS-250 MKII FLOOR GRINDER

The BGS-250 MKII is a single-disc concrete grinder specially designed for small to medium horizontal surface preparation applications. It is very easy and comfortable to use with low vibrations.

The BGS-250 MKII concrete grinder is perfect for surface preparation, surface leveling, preparation before coating, and removal of coating defects or adhesives. Perfect for concrete, stone, asphalt and elastic materials.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for ‘aggressive’ grinding.
- Connect to a dust collector for a dust free, safe working environment.
- Compatible with a wide range of diamond grinding tools, so it can be used for a range of flooring applications.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.



Technical Data	
Motor	2.2kW 230V 50Hz 16A Single Phase
	3.0kW 400V 50Hz 16A Three Phase
Working Speed	1.2kW 110V 50Hz 32A Single Phase
	1440 (230V) RPM
	1510 (400V) RPM 800 (110V) RPM
Working Width	Ø 250mm
Weight	58 Kg
Dimensions	1187 x 482 x 936mm
Folded Position	726 x 482 x 662mm
Drive System	Manual
Working Direction	Push

BG-250E FLOOR GRINDER

The BG-250E is a single-disc, electric powered concrete grinder designed for heavy duty surface preparation applications. It is very easy and comfortable to use with low vibrations. Perfect for concrete, stone, asphalt and elastic materials.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for ‘aggressive’ grinding.
- Connect to an industrial dust collector for a dust free, safe working environment.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.



Technical Data	
Motor	5.5kW 400V 50Hz 16A Three Phase
Working Speed	1920 RPM
Working Width	Ø 250mm
Weight	146 Kg
Dimensions	1301x458x1106mm
Drive System	Manual
Working Direction	Push



BG-250P FLOOR GRINDER

The BG-250P is a petrol powered single disc machine for leveling & removing surfaces. The BG-250P concrete grinder is perfect for those applications that require heavy duty surface preparations of small to medium floors such as surface leveling, preparation before coating, removal of coating defects or adhesives, and much more. The BG-250P is also ideal for use with industrial flooring applications, concrete preparation, and decontamination. Perfect for concrete, stone, asphalt and elastic materials.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for ‘aggressive’ grinding.
- Connect to an industrial dust collector for a dust free, safe working environment.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.



Technical Data	
Motor	7.6 kW (10HP) / Petrol (B&S)
Working Speed	2000 rpm (1300 – 2300 range)
Working Width	Ø 250mm
Weight	142 Kg
Dimensions	1301 x 458 x 1106 mm
Drive System	Manual
Working Direction	Push

THE BG-250A FLOOR GRINDER

The BG-250A is a single-disc concrete grinder ideal for asbestos or lead paint removal from job sites. Designed for heavy duty surface preparation applications. The BG-250A is a single-disc concrete grinder equipped with a special system of vacuum measurement. The machine will automatically stop when the vacuum is too low. The BG-250A single disc grinder is dust free when connected to the appropriate dust collection system. Perfect for concrete, stone, asphalt and elastic materials.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for ‘aggressive’ grinding.
- Connect to an industrial dust collector for a dust free, safe working environment.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.



Technical Data	
Motor	5.5kW 400V 50Hz 16A Three Phase
Working Speed	1920 RPM
Working Width	Ø 250mm
Weight	146 Kg
Dimensions	1301 x 458 x 1106 mm
Drive System	Manual
Working Direction	Push



THE BG-250RS FLOOR GRINDER

The BG-250RS is a single-disc concrete grinder designed for heavy duty surface preparation applications. The BG-250RS is a remote control machine which makes the machine effective and ergonomic to operate and ideal for asbestos removal or lead paint removal. A special program makes the machine automatically grind from left to right. The BG-250RS single disc grinder is dust free when connected to the appropriate dust collection system. Perfect for concrete, stone, asphalt and elastic materials.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the one diamond disc. Perfect for 'aggressive' grinding.
- Connect to an industrial dust collector for a dust free, safe working environment.
- Perfect for industrial flooring. The combination of the centered pressure and long lasting diamond tools makes it perfect for simultaneously removing old coatings and leveling floors.
- Does not use any chemicals or waste water.




Technical Data	
Motor	7.5kW 400V 50Hz 32A Three Phase
Working Speed	1920 RPM
Working Width	Ø 250mm
Weight	230 Kg
Dimensions	1005 x 618 x 1235mm
Working Direction	Forward (Remote Controlled)

THE BB-700E BURNISHER

The BB-700E is a burnisher designed for polished concrete installations & maintenance. It is equipped with an ergonomically comfortable handle in order to reduce operator fatigue. It is the perfect machine for large jobs such as airports, malls, hotels and schools. It can also be connected to a dust collector to work in a dust free environment. Perfect for Concrete, natural stone and terrazzo.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- Single grinding head allows all pressure to be distributed onto the micro polishing pad in use.
- Perfect for improving the beauty and functionality of concrete surfaces, from residential and architectural applications to commercial and industrial sites.
- Does not use any chemicals or waste water.

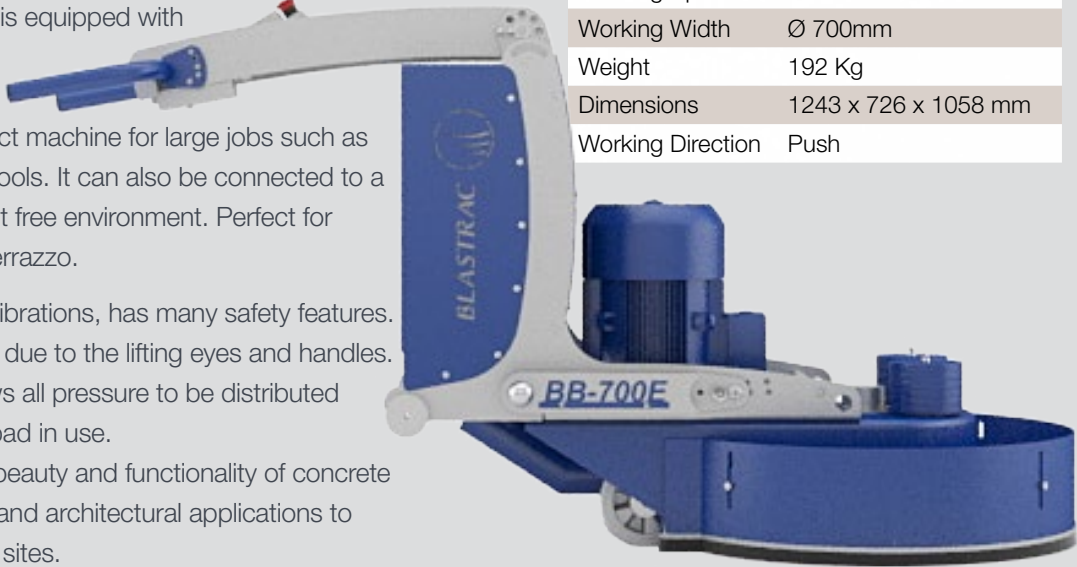

Technical Data	
Motor	7.5kW 400V 50/60Hz 16A Three Phase
Working Speed	300 - 1710 RPM
Working Width	Ø 700mm
Weight	192 Kg
Dimensions	1243 x 726 x 1058 mm
Working Direction	Push



THE BMG-435WD FLOOR GRINDER

The BMG-435WD is a planetary triple head grinder which is perfect for confined areas. It is designed for various sizes of horizontal surface preparation applications. It is an ideal machine for companies dealing with removal of coating, concrete grinding or polishing applications. The BMG-435WD triple head grinder is dust free when connected to the appropriate dust collection system. Perfect for Surface Concrete, Stone, Marble, Asphalt, Granite, Terrazzo

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.

Technical Data	
Motor	2.2kW 230V 50Hz 16A Single Phase
	3.0kW 400V 50Hz 16A Three Phase
	2.2kW 110V 50Hz 32A Single Phase
Working Speed	720 RPM
Working Width	Ø 435mm
Weight	115 Kg
Dimensions	1310 x 460 x 930 mm
Drive System	Manual
Working Direction	Push

THE BMG-435P FLOOR GRINDER

The Blastrac BMG-435P is a petrol motor three headed grinder. The BMG-435P is designed for various sizes of horizontal surface preparation applications. Due to the petrol engine the BMG-435P is an ideal machine for outside coating removal and grinding/polishing applications. The BMG-435P triple head grinder is dust free when connected to the appropriate dust collection system. Perfect for concrete.

- Easy to move, minimum vibrations, has many safety features.
- Can be easily transported due to the lifting eyes and handles.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	3.0 kW / Petrol
Working Speed	500 - 900 rpm
Working Width	Ø 435mm
Weight	130 Kg
Dimensions	1310 x 460 x 930 mm
Drive System	Manual
Working Direction	Push



THE BMG-435SC FLOOR GRINDER

The BMG-435SC is a triple disc grinder which comes standard equipped with speed control. This makes this machine perfect for polishing concrete, marble, stone, granite and terazzo floors. The BMG-435SC triple head grinder is dust free when connected to the appropriate dust collection system.

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	2.2kW 230V 50/60Hz 16A Single Phase
Working Speed	300 - 1000 RPM
Working Width	Ø 435mm
Weight	125 Kg
Dimensions	1310 x 460 x 930 mm
Drive System	Manual
Working Direction	Push

THE BMG-535PRO FLOOR GRINDER

The BMG-535Pro is a triple disc grinder designed for various sizes of surface preparation applications. It is an ideal machine for companies dealing with removal of coating, concrete grinding or polishing applications.

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	7.5kW 400V 50 Hz 15A Three Phase
Working Speed	900 RPM
Working Width	Ø 535mm
Weight	270 Kg
Dimensions	1990 x 535 x 1140 mm
Drive System	Manual
Working Direction	Push



THE BMG-555 FLOOR GRINDER

The BMG-555 is a triple head grinder suitable for various applications. There is no risk of underground deterioration and it can work in places with high hygiene and safety standards. The BMG-555 is designed for various sizes of horizontal surface preparation applications. It is an ideal machine for companies dealing with removal of coating, concrete grinding or polishing applications. The BMG-555 is dust free when connected to the appropriate dust collection system. Perfect for concrete, stone, marble and asphalt.

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	4.0kW 230V 50/60Hz 16A Three Phase
	7.5kW 400V 50/60Hz 16A Three Phase
Working Speed	350 - 1100 RPM
Working Width	Ø 555 mm
Weight	297 Kg
Dimensions	2080 x 595 x 1155 mm
Drive System	Manual
Working Direction	Push

THE BMG-580PRO FLOOR GRINDER

The BMG-580PRO is a triple head grinder with 3 planetary rotating discs Ø185 mm that comes standard with speed control. The BMG-580PRO is designed for various sizes of horizontal surface preparation applications. It is an ideal machine for companies dealing with removal of coating, concrete grinding or polishing applications. The BMG-580PRO triple head grinder is dust free when connected to the appropriate dust collection system. Perfect for Surface Concrete, Stone, Marble, Asphalt

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	7.5kW 400V 50Hz 15A Three Phase
Working Speed	300 - 1000 RPM
Working Width	Ø 580mm
Weight	285 Kg
Dimensions	1990 x 580 x 1140 mm
Drive System	Manual
Working Direction	Push



THE BMG-735PRO MKII FLOOR GRINDER

The BMG-735PRO MKII is a triple head grinder with 3 x Ø240 mm discs suitable for grinding and polishing large surfaces. It has a powerful motor and a solid all metal construction to create the ideal weight. It is designed for finishing large horizontal surfaces. This machine is standard equipped with a speed control system. It is an ideal machine for companies with high hygiene and safety standards such as food, pharmaceutical and medical industries. The BMG-735PRO MKII is dust free when connected to the appropriate dust collection system. Perfect for surface concrete, stone, marble and asphalt.

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	11kW 3x400V 50-60Hz 22A Three Phase
Working Speed	350 - 1100 RPM
Working Width	Ø 735mm
Weight	399 Kg
Dimensions	2296 x 751 x 1251 mm
Working Direction	Push

THE BMG-735RS FLOOR GRINDER

The BMG-735RS is a remote controlled triple head floor grinder with 3 x Ø240 mm discs. Designed for finishing large horizontal surfaces. This machine is standard equipped with a speed control system. The BMG-735RS has a solid all metal construction to create the ideal weight. This triple head grinder is dust free when connected to the appropriate dust collection system. Perfect for concrete, natural stone and asphalt.

- Remote control contributes to a safer work environment, less fatigue on the body, measurable increases in production and a more consistent result.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.




Technical Data	
Motor	11kW 400V 50Hz 22A Three Phase
Working Speed	350 - 1100 RPM
Working Width	Ø 735mm
Weight	465 Kg
Dimensions	1980 x 735 x 1180 mm
Drive System	Electric / 0.15 m/s
Working Direction	Push
Frequency Control	2.4 GHz, Bluetooth
Control Current	12 VDC
Battery Control Unit	12 VDC rechargeable battery



THE BMG-780PRO MKII FLOOR GRINDER

The BMG-780PRO MKII is a thread head floor grinder that is a user friendly machine and comfortable to use with low vibration. Ideal for grinding of large surfaces. The machine has 3 planetary rotating discs with a diameter of 240mm. The BMG-780PRO MKII can be used on both hard and soft surfaces like Concrete, Stone, Marble, Asphalt. The BMG- 780PRO MKII has a solid all metal construction to create the ideal weight. This triple head grinder is dust free when connected to the appropriate dust collection system.

- Easy to move, minimum vibrations and easy control panel.
- Height adjustable handles make it easier to control the machine.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.

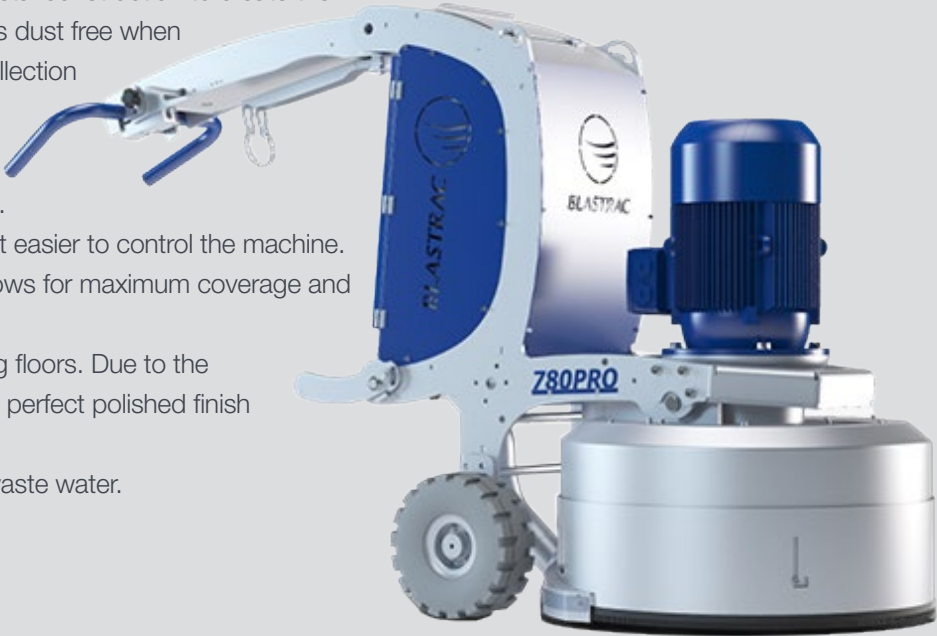

Technical Data	
Motor	15kW 3x400V 50-60Hz 28-32A Three Phase
Working Speed	400 - 1200 RPM
Working Width	Ø 780mm
Weight	487 Kg
Dimensions	2322 x 788 x 1345 mm
Working Direction	Push

THE BMG-780RS MKII FLOOR GRINDER

The Blastrac BMG-780RS MKII is a triple head grinder designed for finishing large horizontal surfaces. The BMG-780RS MKII is a remote control machine which makes the machine very effective and ergonomic to operate. The BMG-780RS MKII triple head grinder is dust free when connected to the appropriate dust collection system. Perfect for concrete, marble, stone and asphalt

- Remote control contributes to a safer work environment, less fatigue on the body, measurable increases in production and a more consistent result.
- The 3 planetary rotating discs allows for maximum coverage and effective pressure distribution.
- Ideal for polishing and maintaining floors as well. Due to the adjustable pressure distribution a perfect polished finish can be achieved.
- Does not use any chemicals or waste water.



Technical Data	
Motor	15kW 3x400V 50-60Hz 33-63A Three Phase
Working Speed	400 - 1200 RPM
Working Width	Ø 780mm
Weight	639 Kg incl. front wheel
Dimensions	2322 x 788 x 1310 mm
Working Direction	Push



THE BS-110 FLOOR STRIPPER

The BS-110 is a small electrical driven floor stripper with interchangeable blades. It has a powerful self-propelled machine, ideal for indoor and outdoor medium sized renovation jobs. This floor stripper is constructed of rugged metal for longevity and durability on the work site. The BS-110 has a forward and backward function and is standard equipped with speed control. With mainly electronic components, this floor stripper requires almost no maintenance to keep running at peak performance. Perfect for Hardwood parquet, ceramics, linoleum, vinyl, carpet, adhesives, glue, tiles, etc.

- User friendly to operate and barely create any vibrations.
- Machine components barely need replacing.
- It is heavy duty and strongly fabricated to create minimum downtime. All machines can easily pass through a standard doorway.
- Does not use any chemicals or waste valuable drinking water.
- Depending on the type of flooring material you would like to remove, there is a wide range of blades or chisels.

Technical Data	
Motor	1.5kW 230V 50-60Hz 16A Single Phase
Working Width	152mm - 305mm (depending on blade type)
Weight	95 Kg (machine) 170 Kg (incl. options & accs)
Dimensions	874 x 536 x 1054mm
Drive System	Electrical 3 – 21 m/min
Working Direction	Push



Technical Data	
Motor	4,0kW – 48V DC
Battery Power	12x 8 V batteries / 10 hours running time
Working Width	152mm - 690 mm (depending on blade type)
Weight	1080 Kg
Dimensions	1497 x 615 x 1326 mm
Drive System	Electrical - Up to 27 m/min
Working Direction	Ride-on

THE BMS-220ADB FLOOR STRIPPER

The BMS-220ADB is a ride-on heavy duty floor stripper with interchangeable blades with the added benefit of being battery operated for increased versatility. The BMS-220ADB can easily and quickly remove of all kind of flooring materials, like; Hardwood parquet, ceramics, linoleum, vinyl, carpet, adhesives, glue, tiles, etc.

- User friendly to operate and barely create any vibrations.
- Machine components barely need replacing.
- It is heavy duty and strongly fabricated to create minimum downtime. All machines can easily pass through a standard doorway.
- Does not use any chemicals or waste valuable drinking water.
- Depending on the type of flooring material you would like to remove, there is a wide range of blades or chisels.



SCOOT

The Scoot is a simple tool that turns your grinder or polisher into a formidable grinding machine! Universal, it comes in three sizes and fits on all grinders. It can be equipped with a pad scratch pad for sanding with soft dry / water or metal pads and a protective cover. The essential that will allow you to work in peace, without tiring you. The Scoot Max suits a 9” Grinder, the standard suits a 7” Grinder and the Mini suits a 5” Grinder.

To easily fit your grinder onto the Scoot : attach your grinder to the Scoot using the 2 supplied bolts. The 2 spherical bearings on the Scoot are to help you reach the angled fixations you may find on some machines.

[Buy SCOOT Here](#)



Technical Data	
Max	Suits a 9” Grinder
Standard	Suits a 7” Grinder
Mini	Suits a 5” Grinder
Application	Flat Sanding
Machine Type	Inverter grinder (Ø125, 180, 230mm depending on format)
Weight	0.760 Kg



SCOOT SET UP WITH HAND HELD GRINDER AND XP DUSTBUDDIE SHROUD




CORNER SCOOT

The Corner Scoot turns your variable speed grinder into an effective corner sander. To install, simply screw the Corner Scoot on the grinder instead of a diamond grinding wheel, secure the Corner Scoot with the adjustable rod and that's it you're ready to corner grind! We can supply you with a large selection of diamond tools to fit the Corner Scoot from #30 up to #3000! It is designed to attach to any 7" or 9" grinder.

[Buy the Corner SCOOT Here](#)




Technical Data	
Scoot Corner	Suits 7" or 9" Grinder
Application	Sanding Angles
Machine Type	Inverter grinder Ø180mm
Weight	6.3 Kg

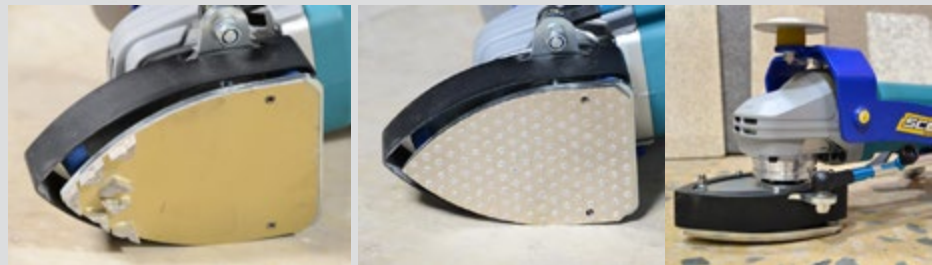

SCOOT WALL GRINDING SYSTEM

The Scoot wall sanding system is adjustable in height and consists of two telescopic ladders, a central rail, a trolley and a system called "compensator of weight" so that the operator no longer has the weight of the sander to carry at arm's length.

It is made to measure: you can determine the length of the rail or for example connect several to allow the simultaneous work of different operators on the same system.

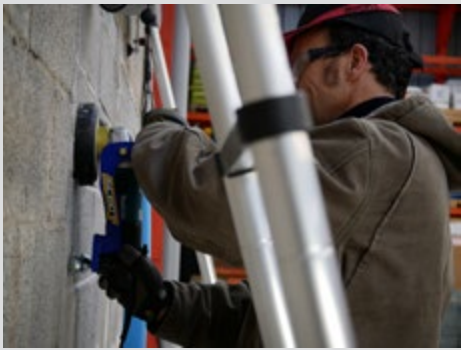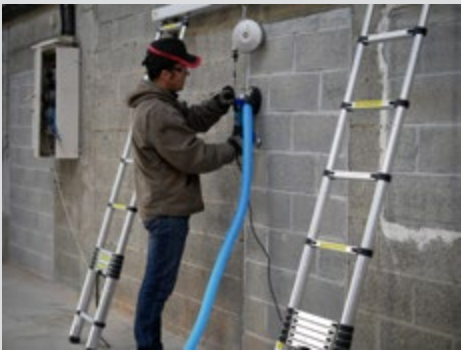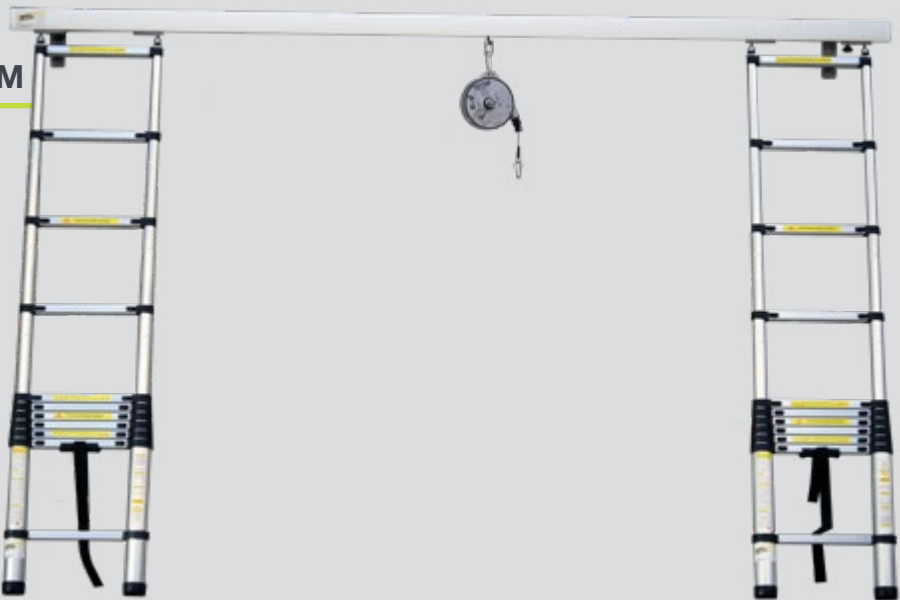

SCOOT STAND-UP

The Scoot Stand-Up makes it possible to transform your variable speed grinder into a bush-hammering machine allowing the user to work standing upright without fatigue. All you have to do is install the system on the grinder, screw in the bush plate and you're done!

This system is easy to install on a Ø180 mm variable speed grinder. Equipped with two support handles, the wide wheels give you the stability you need to stand upright and effortlessly. The shroud has an outlet for connecting a vacuum cleaner.

[Buy the SCOOT Stand-Up Here](#)

Technical Data	
Application	Stand upright while bush hammering
Machine Type	Ø180 variable speed grinder
Weight	4.1 Kg



SCOOT BUSH HAMMER

Bush-hammering is a method of giving the appearance of carved stone to concrete. In addition it also adds anti-slip properties for pavements or stairs. Bush Hammering has many advantages, including no use of toxic products, very little amount of dust, no heavy lifting and the bush hammer plates are fitted directly onto the planetary grinders.

The Scoot Bush hammer incorporates the scoot system to increase its safety. Used with hand held grinders it is equipped with double bearings for better shock resistance. The bush hammer plates made for planetary grinders, can fit any machine on the market.

[Buy the SCOOT Bush Hammer Here](#)

Technical Data	
Application	Bush Hammering
Machine Type	Inverter grinder 180mm
Weight	2.5 Kg



SCOOT 90

The Scoot 90 turns your Scoot into an effective crack repair tool . Take your usual 125 mm grinder with a diamond disc, attach it to the Scoot 90 and you are ready to repair the expansion joints safely and quickly!

[Buy the SCOOT 90 Here](#)

Technical Data	
Scoot 90	Suits a 5" Grinder
Application	Repair of joints and cracks
Machine Type	Dimmer grinder Ø125mm
Weight	2.4 Kg




SCOOT EASY KNEEL

The Scoot Easy kneel is designed to make edge grinding, with a hand held tool much easier on your body.

[Buy the SCOOT Easy Kneel Here](#)

Technical Data	
Application	Grinding close to the ground
Dimensions	600 x 600 x 370 mm
Weight	5 Kg

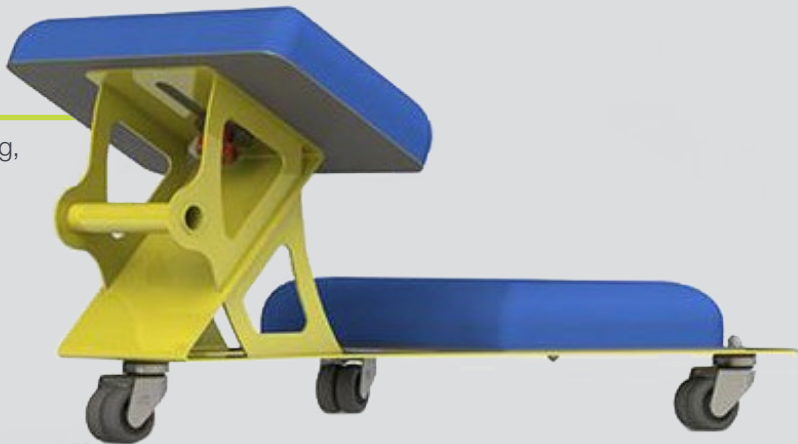

TRAXX SD8000 DUST COLLECTOR

The Traxx SD8000 is one of our latest additions among Industrial Vacuum Cleaners. It is a powerful vacuum cleaner and fits machines SD650 and upwards. Due to the machine's design and filter area, the suction capacity is very good. SD8000 is safe and easy to operate. The machine is equipped with automatic phase shift, which always starts in the right direction.

This Industrial vacuum cleaner uses the Jet-Pulse cleaning system that pulses the filters to keep them clean. The machine is also equipped with HEPA filter (H13 filter) which takes care of harmful silica particles. The machine is equipped with a filter indicator that informs the user that it is time to clean the filter.

SD8000 takes advantage of the Longopac bagging system, which makes managing dust easy and efficient. With the Longopac system you will get 20m/60ft of folded plastic bag that gives you about 25 dust free Changes. SD8000 has powerful and puncture-free wheels that do not leave marks behind. The machine also has lockable front wheels that simplify transport and work on uneven Surfaces.

Technical Data	
Power	5.5 kW
Voltage	400V, 3-phase
Current	16 Amp
Max. Airflow	530 m3/h
Max. Vacuum	300 mbar
Hose	10m x Ø76mm / 10m x Ø50mm
Inlet	Ø 76mm
Primary filter	Polyester filter bag 2.1 m2 99.5%
Microfilter	3.4 m2 (2x1.7 m2) 99.95%
Sound level	70 dB
Dimensions	1120x735x1600 mm
Weight kg (lbs)	215kg
Frequency	50 Hz/ 60 Hz
Filter Cleaning	Semi-automatic Jetpuls



TRAXX SD3600 DUST COLLECTOR

The Traxx SD3600 is a very good and useful industrial vacuum cleaner entirely made of steel. This vacuum cleaner is a good option for the SC500 and SC650. This industrial vacuum cleaner performs best with SC500 as the combination contributes to a completely dust-free environment.

This Industrial vacuum cleaner uses the Jet-Pulse cleaning system that pulses the filters to keep them clean. This model is also equipped with a filter indicator that informs the user that it is time to clean the filter.

SD3600 takes advantage of the Longopac bagging system, which makes managing dust very easy and efficient.

The SD3600 is equipped with 3 motors with separate switches, this is to limit start current but also to match the availability of fuses. The machine is safe and user-friendly and is equipped with powerful puncture-free wheels that do not leave any marks behind.

Technical Data	
Power	3.6 kW
Voltage	230 V 1~
Current	16 Amp
Max. Airflow	500 m3/h
Max. Vacuum	300 mbar
Hose	10m x Ø50mm
Inlet	Ø 50mm
Primary filter	Polyester filter bag 3.6 m2 99.5%
Microfilter	2.7 m2 (3x0.9 m2) 99.95%
Sound level	85 dB
Dimensions	970x580x1370 mm
Weight kg (lbs)	90 Kg
Frequency	50 Hz/ 60 Hz
Filter Cleaning	Semi-automatic Jetpuls



TRAXX SD2900
DUST COLLECTOR

The dust collector SD2900 is a great option for all of our smaller grinders; From SC18 up to SC500PD. SD2900 is a versatile and efficient dust collector, known for its high reliability and performance. The cylindrical design functions as a pre-separator, causing heavy particulate to separate from the fine dust. This allowing heavy particles to drop into the bottom of the cyclone, bypassing the filters completely, increasing filter life and suction performance.

The SD2900 is equipped with the efficient Jet-Pulse system that pulses the filters in order to keep them clean. It uses sock filters, which can easily be washed in order to prolong filter life.

The SD2900 takes advantage of the Longopac bagging system, which makes managing dust very easy and efficient.

For smoother transport and storage it is equipped with gas springs making it easy to adjust the height of the machine.



Technical Data	
Power	2.8 kW
Voltage	220 - 240V
Current	10 Amp
Max. Airflow	420 m3/h
Max. Vacuum	230 mbar
Hose	Ø 50 mm
Inlet	Ø 50 mm
Primary Filter	Sockfilter
Microfilter	H13
Sound level	65 dB
Filter Cleaning	Semi Automatic
Dimensions cm	560x800x1300 mm
Weight kg (lbs)	54 Kg
Frequency	50 Hz / 60 Hz
Floor Nozzle	450 mm

TRAXX SD1300
DUST COLLECTOR

The Traxx SD1300 is known for its good suction performance and high reliability. The cyclone separates rough material before any filter is charged. The main filter package consists of washable and durable fabric filter socks. Absolute filters take care of the small health hazardous particles, the filters are of type H13 (HEPA classification). To achieve maximum suction capacity is SD1300 equipped with filter cleaning, called Jetpuls.

To handle the sucked up material the smart solution Longo-pacs used, which makes managing dust very easy and efficient. SD1300 is also equipped with outlets for grinding machines with an engine capacity of up to 1200W.



Technical Data	
Power	12.6 kW
Suction Capacity	210 m3/h
Vacuum	22 kPa
Fine Filter	Polyester
HEPA Filter	H13
Jetpuls	Yes
Diameter	680x380x1200 mm
Weight	27 Kg

TRAXX PS6000
PRE-SEPARATOR

The Traxx PS6000 Pre-Seperator is a great addition to SD8000 to achieve an optimal result. PS6000 separates up to 90% of the dust particles. This means that the filters in SD8000 does not need to be cleaned as often and even gets a longer life. Additionally, air flow is kept higher for a long time.

PS6000 is supplied with a 3 metre long hose for connecting to an industrial vacuum cleaner.



TRAXX PS1300 PRE-SEPARATOR

The Traxx PS1300 is a small 35 liter pre-separator with built in vacuum equalizer for use with a plastic bag.

Features:

- Small & light.
- Efficient dust separation
- Prolongs filter-life (of the dust extractor)
- Increases storage capacity significantly
- Equipped with loose plastic bag
- Ideal in combination with all one and two motor Scanmaskin HEPA Dust Extractors

Technical Data	
Inlet	38 mm diameter
Volume	33 ltr
Dust collection	Disp. plastic bag
Dimensions	420x485x840 mm
Weight	14 kg



TV3000 & TV45000
DUST COLLECTOR VACUUMS

With advanced technologies and accumulated know-how, the TV3000 Twin Dust Collector and TV4500 Dust Collector have powerful suction capacity and filtration technology that allows for perfect collection of both airborne dust and even the remaining dust on the floor.

The TV3000 and TV4500 are ideal for all surface preparations equipments such as grinders, polishers and scarifying machines that are used in construction sites, factories and warehouses.

[Buy Traxx TV3000 Dust Collector Here](#)

[Buy Traxx TV4500 Dust Collector Here](#)

Technical Data TV3000	
Voltage	220V 50/60Hz, single phase
Power	2400W (1200W x 2, 3.2HP)
Air pressure	2600mmAq
Airflow	280 c.f.m
Hose	50 Ø / 75 Ø
Weight	65 Kg
Dimensions	600 x 600 x 1450 mm
Plastic dust bag	500 x 800mm LDPE
Noise	65db



FEATURES:

- The PTFE filter makes it hard for substances to stick to the filter creating easy removal, protecting the motor from being damaged by the dust and particles.
- The secondary filter (Ultra HEPA) aids in collecting hazardous particles such as Asbestos and silica. Traxx TV3000A and TV4500A (Asbestos) are certified to comply with Dispersed Oil Particulate (DOP) test, as mentioned in the Australian Standard IEC 60335.2.69.
- The automatic filter cleaner operates at regular intervals, where the rotator impacts the inner part of the metal coated Hepa Filter to remove 99% of dust, to the Longopac collection system. This allows dramatically extended cleaning intervals.

Technical Data TV4500	
Voltage	220V 50/60Hz, single phase
Power	3600W (4.7HP)
Air pressure	3000mmAq
Airflow	330 c.f.m
Hose	50 Ø / 75 Ø
Weight	80 kg
Dimensions	750 x 700 x 1550 mm
Plastic dust bag	500 x 800mm LDPE
Noise	75db



RONDA 370 VACUUM

RONDA® 370 is a small, mobile recycling system for cooling water supplies in connection with diamond drilling, grinding and sawing. The cleaning system of the machine purifies concrete sludge and ensures continuous recycling of cooling water. At the same time the machine can be used as a wet vacuum to collect liquids and sludge.

RONDA 370 has an Integrated cooling water pump for diamond drilling, grinding and small sawing tasks. A special filter bag for filtering concrete sludge. A Float to protect liquid entering the motor. Low noise level and easy manoeuvrability.

Technical Data	
By-pass motor	1200 W
Max Vacuum	2450 mm/Wc
Airflow	58 l/sec.
Noise level	<70 dB(A)
Collection capacity	35 L
Dimensions	100x57.5x59cm
Cable Length	8m
Liquid Capacity	15 L
Pump Head	15 m



TRAXX SD500
DUST EXTRACTOR

The perfect machine for extracting any residual dust from confined space grinding. Can be ducted significant distances using flexible ducting.



Technical Data	
Full speed	477 m3/h
Half Speed	270 m3/h
Voltage	240 V
Motor Power	260 W
Weight	19.5 Kg

KOR-VAC

Sucks up slurry quickly and easily.

- Reliable Honda 1.3 HP, 4 cycle gasoline motor
- Less equipment needed as no generator is required
- Easy maneuverability
- 100" of water lift with 207.28 m3/h volume
- Incorporates swivel caster and large diameter wheels
- Easy waste removal - large 50.8 mm dump valve
- Auto shuts off when drum is full
- Rust resistant, durable attachments 3 meter hose, chromed plated wand and 355mm light weight aluminium nozzle.

Technical Data	KV-30	KV-55
Power Source	Gasoline	Gasoline
Drum Size	113 L	208 L



DEP25 WET/DRY VACUUM DUST EXTRACTOR

Purpose-built to work in conjunction with our power tools, the DEP25 Wet / Dry Vacuum Dust Extractor System has integrated switching for tools up to 2200W. So you don't need to turn the machine on or off manually, just operate the switch! Whether you are using a sander, circular saw, wall chaser, scouring machine or other power tool, the features of the DEP25 are designed to fit the needs of professionals. Variable suction power allows you to tailor the vacuum to the job at hand

[Buy the DEP25 Wet/Dry Vacuum Dust Extractor Here](#)

Technical Data	
Power input	1200W
Voltage	110-120V~ 50-60Hz, 220-240V~ 50-60Hz
Max. Airflow	4000 L/min
Max. Suction (lift)	25 kpa
Max. Dust capacity	25 L
Max. Connected Tool	2200 W
Dimensions	598 x 408 x 420mm
Weight	13.8 Kg



GVS30 VACUUM

The GVS30 has the ability to vacuum both dust and water with it's powerful suction capabilities. The tank is made from stainless steel and all the suction hoses and accessories made of high quality materials making the GVS30 very durable. This machine is suitable for hotel, office and warehouse use.

Technical Data	
Power	1000 W, single phase
Capacity	30L
Voltage	220-240 Volt ~ 50 Hz
Vacuum Suction	230 bar
Air Flow	53 L/s
Diameter	345mm



GVS90 - 3 VACUUM

With a strong responding motor, this machine is ideal to vacuum both dust and water. It has multi-purpose attachments that fix to the main unit easily. The GVS90 is suitable for large scale workshops, factory premises, malls, hotels, office buildings and other large scale public places

Technical Data	
Power	3000 W, single phase
Capacity	90L
Voltage	220-240 Volt ~ 50 Hz
Vacuum Suction	250 bar
Air Flow	120 L/s
Material	Heavy duty plastic drum
Tank Diameter	440 mm



GVS90-3 HEAVY DUTY TROLLEY

A Heavy Duty Trolley for the GVS90-3 Vacuum. It makes transiting over rough terrain or up and down stairs a cinch, even when full. Existing GVS models bolt on in seconds and can be removed even quicker.



DVC862LZ BRUSHLESS DUST EXTRACTION VACUUM

- Powered by two 18V LXT batteries
- Variable suction power control
- Up to 9.8kPa suction
- Variable suction power control by dial
- Approximately 30 - 65 minutes runtime depending on batteries used

Technical Data	
Air Pressure	9.8 kPa
Air Volume	2.1m3/min
Continuous Run Time	40mins with 2x BL1850B
Net Weight	7.6kg
Suction Power	90W
Tank Capacity	Dry: 8L / Wet: 6L



DVC260ZX8: BRUSHLESS BACKPACK VACUUM

- Comfortable backpack harness optimised for long use
- 2L dust capacity and HEPA filter
- 7.1kPa Max sealed air suction
- Up to 60 minutes run time on high with two 5.0Ah batteries
- Durable aluminium wand, large 38mm pipe and enlarged floor nozzle

Technical Data	
Air Volume	1.5m3/min
Air Volume	1.5m3/min
Continuous Use - High	BL1850B: 60mins
Continuous Use- Low	BL1850B: 90mins
Dust Collecting Capacity	2.0L
Max. Sealed Suction	7.1kPa
Net Weight	2x BL1850B: 4.3kg
Suction Power	High: 45W / Low: 25W



THE BDC-1133PM DUST COLLECTOR

The BDC-1133PM is a compact dust collection system, ideal for hand tools and small grinding machines. It can be used for both wet and dry applications. It is equipped with a M-Class filter.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and it's ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water



Technical Data	
Motor	1.2kW 230V 50 Hz 6A
	1.2kW 230V 60 Hz 6A
Dust Extraction	1 Motor
Weight	16 Kg
Dimensions	600 x 380 x 620 mm
Max Air flow	270 m3/h
Vacuum	250 hPa
Filter	M Class filters
Cleaning	Automatic reverse air pulse
Dust Bag	35 Litres
Dust Hose Inlet	Ø 36 mm

THE BDC-1133PHC DUST COLLECTOR

The BDC-1133PHC is a compact dust collection system ideal for hand tools and small grinding machines. It can be used for both wet and dry applications. Specially designed to deal with hazardous materials due to its Hepa filter and H-Class certification. Also able in asbestos environment with the additional asbestos kit.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and it's ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water



Technical Data	
Motor	1.2kW 230V 50 Hz 6A
	1.2kW 230V 60 Hz 6A
Dust Extraction	1 Motor
Weight	16 Kg
Dimensions	600 x 380 x 620 mm
Max Air flow	270 m3/h
Vacuum	250 hPa
Filter	M & H Class filters
Cleaning	Automatic reverse air pulse
Dust Bag	33 Litres
Dust Hose Inlet	Ø 36 mm



THE BDC-122M DUST COLLECTOR

The BDC-122M is a heavy duty dust collection system. The BDC-122M is ideally suited for use with small shot blasting, grinding, polishing and scarifying machines.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water.



Technical Data	
Motor	2kW 230V 50 & 60Hz 8.5A
Dust Extraction	2 Motors
Weight	53 Kg
Dimensions	660 x 600 x 1275 mm
Max Air flow	330 m3/h
Vacuum	211 hPa
Filter	M-class star filter
Cleaning	Manual shaker on top
Dust Bag	Adjustable up to 25 Kg
Dust Hose Inlet	Ø 51mm

THE BDC-122HC DUST COLLECTOR

Asbestos version of the BDC-122M. The BDC-122HC is a heavy duty dust collection system. This machine is completely H-class certified according to European standard en 60335-2-69 annex AA

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust\ bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water.



Technical Data	
Motor	2kW 230V 50 & 60Hz 8.5A
Dust Extraction	2 Motors
Weight	53 Kg
Dimensions	660 x 600 x 1275 mm
Max Air flow	330 m3/h
Vacuum	211 hPa
Filter	M-class star filter H14 Hepa Filter
Cleaning	Manual shaker on top
Dust Bag	Adjustable up to 25 Kg
Dust Hose Inlet	Ø 51mm



THE BDC-133HCU DUST COLLECTOR

The BDC-133HCU is a heavy duty dust collection system. This machine is completely H-class certified according to European standard EN 60335-2-69 Annex AA. It is especially designed to deal with hazardous materials such as asbestos.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water.



Technical Data	
Motor	3kW 230V 50 & 60Hz 16A
Dust Extraction	3 Motors
Weight	71 Kg
Dimensions	800 x 600 x 1650 mm
Max Air flow	390 m3/h
Vacuum	211 hPa
Filter	M-class star filter H14 Hepa Filter
Cleaning	Manual shaker on top
Dust Bag	Adjustable up to 25 Kg
Dust Hose Inlet	Ø 51mm / Ø 76mm

THE BDC-1330LPP DUST COLLECTOR

The BDC-1330LPP is similar in performance to the BDC-1330LP dust collector, but has an automatic pulse filter cleaning system. It is equipped with a Longopac bagging system, which is easy to mount and handle. Thanks to thissystem, operators have no more contact with the dust in their direct vicinity. The BDC-1330LPP comes standard with a M-class cartridge filter or optional H-class filter and is versatile. Suitable for Large grinders and scarifiers.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water.



Technical Data	
Motor	4.5kW 230V 50/60Hz 16A
Dust Extraction	3 Motors
Weight	127 Kg
Dimensions	600 x 980 x 1780 mm
Max Air flow	450 m3/h
Vacuum	211 hPa
Filter	3 Cartridge Filters
Cleaning	Automatic pulse system
Dust Bag	Endless bagging system
Dust Hose Inlet	Ø 51mm / Ø 76mm



THE BDC-3140LP DUST COLLECTOR

The BDC-3140LP is a powerful dust collection system designed for the toughest jobs. Equipped with a Longopac bagging system, which is easy to mount and handle. Thanks to this system, operators have no more contact with the dust in their direct vicinity. The BDC-3140LP comes standard equipped with a M-class cartridge filter and is versatile. Suitable for Large grinders and scarifiers.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water.



Technical Data	
Motor	4.5kW 400V 50 & 60Hz 16A
Dust Extraction	1 Powerful Motor
Weight	127 Kg
Dimensions	670x1055x1525mm
Max Air flow	516 m3/h
Vacuum	300 hPa
Filter	M-class star filter
Cleaning	Manual shaker on top
Dust Bag	Endless bagging system
Dust Hose Inlet	Ø 51mm / Ø 76mm

THE BDC-3140LPP DUST COLLECTOR

The BDC-3140LPP is a heavy duty dust collection system equipped with an automatic pulse filter cleaning system. Designed for uninterrupted operation on the toughest jobs. It is equipped with a Longopac bagging system, which is easy to mount and handle. Thanks to this system, operators have no more contact with the dust in their direct vicinity. The BDC-3140LPP comes standard equipped with a M-class cartridge filter or optional H-class filter and is very versatile.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- Limited downtime is essential for any successful job. Due to the special designs the system allows you to change the dust bag quickly for limited downtime.
- Does not use any chemicals or waste water.



Technical Data	
Motor	4kW 440V 60Hz 16A
Dust Extraction	1 Powerful Motor
Weight	200 Kg
Dimensions	600x1200x1600mm
Max Air flow	516 m3/h
Vacuum	300 hPa
Filter	3 Cartridge Filters
Cleaning	Automatic pulse cleaning system
Dust Bag	Endless bagging system
Dust Hose Inlet	Ø 51mm / Ø 76mm



THE BDC-44/BDC-66/BDC-99 DUST COLLECTORS

The **BDC-44** dust collector combines power, efficiency, safety, and productivity all into one durable machine. The **BDC-66** dust collector is a compact and insulated unit, easy to transport, without risk of damages and with reduced noise level. The **BDC-99** is a heavy duty dust collection system ideal for the toughest jobs and applications. They can be equipped with a Longopac bagging system, big-bag system or dust bin kit which is easy to mount and handle. Suitable for medium to large grinders and scarifiers. Comes standard equipped with a M-class cartridge filter or optional H-class filter kit.

- Easy to move and transport due to the robust wheels with brake systems.
- User friendly design, just connect the hose to the dust collector and you are ready to go.
- High suction power, filter options and large dust bin capacity make sure all dust is safely collected.
- The special designed system allows you to change the dust bag quickly for limited downtime.
- Fan and compressors are able to be switched on and off separately, enabling more effective cleaning of the filters, without having to run the fan unit.
- Does not use any chemicals or waste water.



Technical Data	BDC-44	BDC-66	BDC-99
Motor	6kW 400V 50Hz 32A 5 pole CE plug	6kW 400V 50Hz 63A 5 pole CE plug	8.5kW 400V 50Hz 63A 5 pole CE plug
	6,0kW 460V 60Hz 32A 5 pole CE plug	-	-
Dust Extraction	1 Powerful Motor	1 Powerful Motor	1 Powerful Motor
Weight	297 Kg	460 Kg	460 Kg
Dimensions	666 x 1294 x 1430 mm	757 x 1731 x 1643 mm	866 x 1731 x 1643 mm
Max Air flow	752 m3/h	2200 m3/h	2535 m3/h
Vacuum	61 hPa	51 hPa	66 hPa
Filter	4 high quality cartridge filters	6 high quality cartridge filters	9 high quality cartridge filters
Cleaning	Automatic pulse cleaning system	Automatic pulse cleaning system	Automatic pulse cleaning system
Dust Bag	Endless bagging system	67.5 / 145 Litres	67.5 / 145 Litres
Dust Hose Inlet	Ø 76mm / Ø 102mm / Ø 127mm	Ø 127mm / Ø 150mm	Ø 127mm / Ø 150mm



HEPA BACK PACK VACUUM

Whether it's cleaning carpet in a school or tearing out lead contaminated paint, we know how important it is to you that what you suck up stays in the vacuum. The HEPA Back Pack vacuum will not exhaust dust back into the air. Using a clamp down, sealed top and three step HEPA filtration system, the vacuum captures 99.97% of particles at 0.3 microns.

- Exhausts absolutely no dust back into the air
- Triple layer HEPA filter system
- Meets EPA lead safe requirements for lead paint removal from walls, floors, and carpets
- Clean filters without opening the unit
- The HEPA filter bags can be completely sealed off and discarded when full



DUSTLESS WET/DRY VACUUM

The Dustless Wet/Dry Vacuum is perfect for when you are looking for a filter that can get nearly everything but you don't need a HEPA Vacuum.

- Exhausts absolutely no dust back into the air
- Triple layer filter system capturing 99.97% of particles
- Captures extremely fine dust from drywall, concrete, wood, fibre glass, stone, and masonry products
- Clean filters without opening the unit
- Go between wet and dry without switching filters
- Filters and pre-filters won't be compromised by water or slurry
- Large capacity barrel easily holds 40 pounds of dust



HEPA DUSTLESS WET/DRY VACUUM

HEPA stands for "High Efficiency Particulate Air". If you're looking for a filter than can get everything, the HEPA Dustless Wet/Dry Vacuum is it. A Dustless HEPA filter captures 99.97% of particles and will suck up dust, dirt, debris, water, and slurry—all at the same time.

- Fully certified and serialized HEPA filter for airtight rating
- Safe for silica, asbestos, lead paint, and hexavalent chromium removal and containment
- OSHA and EPA RRP compliant w/semi-auto filter cleaning mechanism
- Go between wet and dry without switching filters
- Filters and pre-filters won't be compromised by water or slurry
- Will never blow dust or pickup back into the air
- Large capacity barrel easily holds 40 pounds of dust



DUST DROID 300

The DustDroid 300 uses an industrial 120v motor which pull an astonishing 300 CFM - more than double the strongest wet dry vacuum. This suction works great for a large walk behind polisher, a small to medium walk behind grinder, or up to 3 hand grinders for dust collection in industrial settings. The two tanks hold 20 and 30 gallons each and are easily cleaned out by using the included bags.

- Certified HEPA filter rated at 99.97% containment at 0.3 microns
- Safe for silica, asbestos, lead paint, and hexavalent chromium removal and containment
- OSHA Silica Rule and EPA RRP compliant
- Will never blow dust or pickup back into the air
- Air Bender technology diverts 98 of every 100 pounds of dust and debris from the filter into a tank
- Two onboard drums for containment (one each 20 and 30-gallon)
- Heavy duty frame made from 1/8" steel tubing and 16 gauge steel
- Non-marking rubber casters
- Solenoid-free Silica Rule-compliant filter cleaning for reliable performance and less maintenance



DUST DROID 600

The DustDroid 600 uses two 110v motors which pull an astonishing 600 CFM - nearly 5 times more than the average wet dry vacuum. This suction works great for industrial-grade dust collection for several walk behinds or up to 8 hand grinders. The dual 30-gallon tanks can hold up to 60 gallons of debris while the wheels on the main collection tank and included heavy-duty bags make emptying a breeze.

- Certified HEPA filters rated at 99.97% containment at 0.3 microns
- Safe for silica, asbestos, lead paint, and hexavalent chromium removal and containment
- OSHA and EPA RRP compliant
- Will never blow dust or pickup back into the air
- AirBender technology diverts 98 of every 100 pounds of dust and debris from the filter into a tank
- 2 onboard 30-gallon drums for containment (optional 50-gallon drum)
- Heavy duty frame made from 1/8" steel tubing and 16 gauge steel
- Non-marking rubber casters
- Solenoid-free Silica Rule-complaint filter cleaning for reliable performance and less maintenance
- Runs on two 110v lines or one 240v line



SLURRY VACUUM SYSTEM

The Slurry Vac System has an astonishing boxed water lift of 130 inches. This allows the user to pull water at ground level up to 100 feet away. Using the included slurry wand kit, the intense suction makes for easy clean up of slurry residue at job sites and can be used with dust shrouds for wet grinding, cutting, sawing, and drilling.

- Recommended for clean up after slurry-generating Table 1 operations under OSHA's Silica Rule
- Prevents re-suspension of hazardous dust from dried slurry
- Helps comply with EPA and local laws to keep slurry out of storm drains and sewage systems
- Universal to 55-gallon drums
- Sealed drum head keeps debris out of the motor
- Runs off standard 15-amp power
- Built in drain for easy clean up



LYNX ASH VACUUM

Gives you a reliable vacuum that won't spit out ash. A dual layer HEPA filtration system protects the motor and keep ash from being sent out into your home. The Lynx is designed to suck up cold to warm fine ash. While this vacuum should not be used with hot ash or coals, should you accidentally suck up too hot of ash or a live coal, this vacuum will not catch fire. The flame-resistant filters will protect up to 537 °C, while the thermal plastic components will never catch fire.

- For use with cool to warm fine ash
- HEPA filter system prevents any ash from circulating back into the air
- Thermal shut down protects the vacuum from hot, billowing air
- Fire resistant components prevent sucked up materials from catching fire
- Clean the filters without opening the unit
- Includes full set of accessories engineered to capture dust from tight places
- Ideal for fireplaces, wood stoves, pellet stoves, fireplaces, and BBQs



DUSTBUDDIE™

The DustBuddie captures nearly all dust generated while sawing. Using vacuum suction, the dust and debris are caught, giving you a truly dustless work environment. Protecting you and your workers from breathing harmful silica dust while keeping the area dust free, saving time and money in clean up.

- Fits most 4" to 5" angle grinders and most 7" to 9" angle grinders
- Fits collars 2.1" down to 1.3" and 3" down to 1.8"
- Made of polycarbonate for rugged durability
- Removable front edge of shroud for grinding close to a wall
- Patented floating head design
- Replaceable brush skirt improves dust collection
- Complies with OSHA silica laws and EPA Regulations for point-of-origin dust containment



Dustless
TECHNOLOGIES

Dustless
TECHNOLOGIES

DUSTBUDDIE XP

The DustBuddie XP captures nearly all dust generated while sawing. Using vacuum suction, the dust and debris are caught, giving you a truly dustless work environment. This protects you and your workers from breathing harmful silica dust while keeping the area dust free, saving time and money in clean up.

- Vacuum shroud used in dust containment while using angle grinders
- Fits most 4" to 5" angle grinders and most 7" to 9" angle grinders
- Fits collars 2.1" down to 1.3" and collars 3" down to 1.8"
- Made of glass-filled nylon for abrasion resistance and rugged durability
- Sliding front edge of shroud for grinding close to a wall or edge
- Patented floating head design
- Replaceable brush skirt improves dust collection
- Complies with OSHA silica laws and EPA regulations for point-of-origin dust containment



DUSTBUDDIE IN CLAMSHELL

- Polycarbonate for improved durability
- Fast and Easy installation with universal bracket band clamp combination
- Removable front edge for grinding close to wall
- Brushes on base make it easier on rough surfaces like grout, ledges and pitted concrete
- Complies with EPA regulations for point-of-origin dust containment
- Fits most 4" and 5" and most 6" to 9" hand grinders
- Fits collars 2.1" down to 1.3" and collars 3" down to 1.8"



DISCBUDDIE

- Shroud made from polycarbonate, the same material as bullet proof glass
- Point of origin dust control shroud
- Long brushes around the edge conform to extremely irregular surfaces for superior dust containment
- Shroud adjusts in and out and to different angles to better fit sanding pad.
- Clear polycarbonate for improved visibility and durability
- Complies with EPA regulations for point-of-origin dust containment
- Works very well for sanding clap board



DUSTIE®

The Dustie captures nearly all dust generated while grinding. Using vacuum suction, the dust and debris are caught, giving you a truly dustless work environment. This saves you and your workers from breathing harmful silica dust while keeping the area dust free, saving time and money in clean up.


The Dustie is a one time use shroud, offered as an economical solution to quick jobs. When you have finished grinding the main portion of your project, the edge of the Dustie can be cut away using scissors or a knife to expose part of the cup wheel. This allows you to grind against walls and complete the job while maintaining dust collection.

- Vacuum shroud used in dust containment while using angle grinders
- Fits most 4" to 5" and most 7" to 9" angle grinders
- Intended for DIY projects as a disposable, one time use shroud
- Made of ABS plastic as an economical solution to quick jobs
- Cut away front edge of shroud for grinding close to a wall or edge
- Patented flex flange head design
- Complies with EPA regulations for point-of-origin dust containment



DUSTIE & CUP WHEEL

- Fast and easy installation with Flex Flange
- Included double row cup wheel is great for getting small jobs done Dustless
- Captures up to 99% of airborne dust
- Complies with EPA regulations for point-of-origin dust containment
- Fits most 4" and 5" hand grinders and most 6" to 9" hand grinders

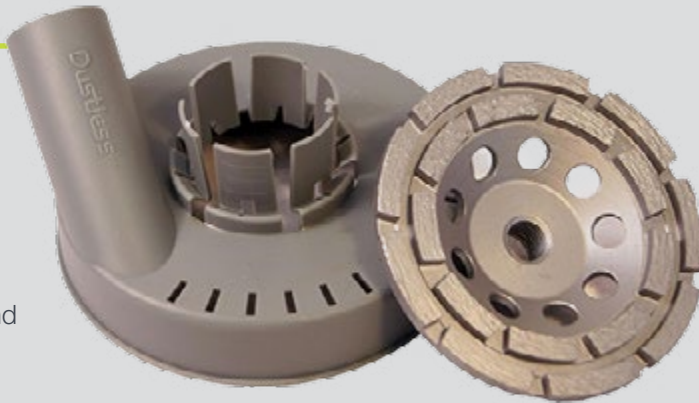

CUTBUDDIE™

The CutBuddie captures nearly all dust generated while sawing. The installation is quick and easy. Slip the shroud head around the grinder collar and tighten one screw. The patented "floating head" design allows a flexible fit to your grinder. This allows the grinder to contour to the surface, keeping maximum dust containment while allowing you to grind naturally without a stiff fit.


- Vacuum shroud used in dust containment while tuck pointing and crack chasing with angle grinders
- Fits most 4" to 5" and most 7" to 9" angle grinders
- Fits collars 2.1" down to 1.3" and 3" down to 1.8"
- Adjustable depth for cutting up to 1.2" or 1.5"
- Made of polycarbonate for rugged durability
- Metal baseplate takes heavy jobsite abuse
- Complies with OSHA silica laws and EPA Regulations for point-of-origin dust containment



DUSTBUDDIE FOR FLATWORK & UNIVERSAL MOUNTING KIT

The DustBuddie is meant to fit most gas powered cut off saws. Using vacuum suction, the dust and debris are caught in their natural trajectory, giving you a truly dustless work environment. Protecting you and your workers from breathing harmful silica dust. The four mounted feet protect the shroud and the surface you are working on. When working on sensitive surfaces you can be assured that the shroud will not scratch or scrape decorative work.

- Vacuum shroud used in dust containment while using gas powered saws for flatwork
- Captures up to 90% of concrete dust
- Fits most gas powered cut off saws
- Made of aluminium for rugged durability
- Polyurethane sliders to protect the work surface
- Connects to a 2" soft hose cuff
- Complies with OSHA silica laws and EPA Regulations for point-of-origin dust containment
- Requires a 260 CFM vacuum system for full containment (2 wet dry vacuums or one industrial vacuum)

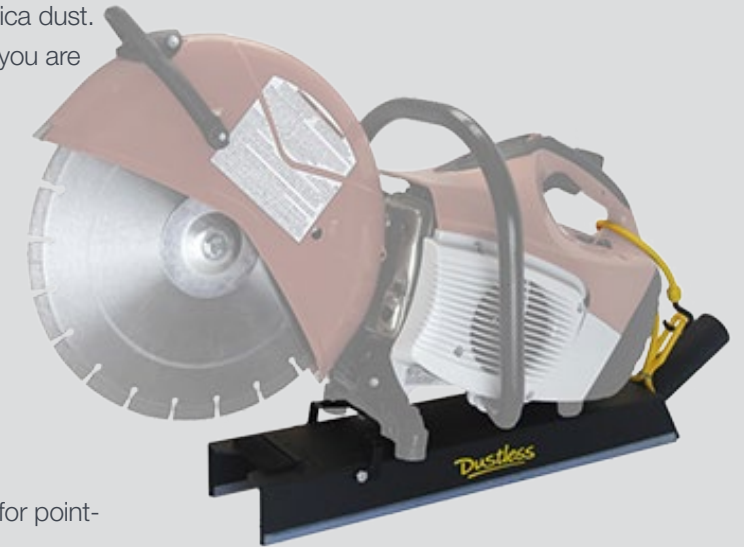

DUSTBULL & UNIVERSAL MOUNTING KIT

The DustBull is meant to fit most gas powered cut off saws. Using a vacuum with 260 CFM or more, the DustBull captures nearly all dust generated while sawing. Using vacuum suction, the dust and debris are caught in their natural trajectory, giving you a truly dustless work environment. Protecting you and your workers from breathing harmful silica dust. The four mounted feet protect the shroud and the surface you are working on. When working on sensitive surfaces you can be assured that the shroud will not scratch or scrape decorative work.

- Vacuum shroud used in dust containment while using gas powered saws for masonry work
- Captures up to 90% of concrete dust
- Fits most gas powered cut off saws
- Made of aluminium for rugged durability
- Rubber feet protect the work surface
- Connects to a 2" soft hose cuff
- Complies with OSHA silica laws and EPA Regulations for point-of-origin dust containment
- Requires a 260 CFM vacuum system for full containment (2 wet dry vacuums or one industrial vacuum)



SAWBUDDIE

The SawBuddie is meant to fit most models of reciprocating saws. The included adapter hose will connect to most standard wet dry vacuums. The SawBuddie captures nearly all dust generated while sawing. Using vacuum suction, the dust and debris are caught in their natural trajectory, giving you a truly dustless work environment. Protecting you and your workers from breathing harmful dust.

- Vacuum shroud used in dust containment while using reciprocating saws
- Fits most models of reciprocating saws
- Line-of-site gap for clear view of the blade to ensure precise cutting
- 2.5" bristles create a seal while maintaining flexibility in cutting
- Complies with EPA Regulations for point-of-origin dust containment




DUSTBUDDIE FOR WORM DRIVE SAWS

The DustBuddie is meant to fit most 7 1/4" worm drive and hypoid circular saws and will adapt to most standard wet dry vacuums. The DustBuddie captures nearly all dust generated while sawing. Using vacuum suction, the dust and debris are caught at the front and the back of the blade, giving you a truly dustless work environment. Protecting you and your workers from breathing harmful silica dust.

Six mounted wheels allow you to "feel" the cuts better, allowing maximum dust collection while not sacrificing mobility. The wheels also keep the steel bottom from damaging the surface you are working on. You will glide smoothly and evenly over the surface without destroying your work. The stainless steel baseplate protects the shroud in rough environments.

- Vacuum shroud used in dust containment while using worm drive and hypoid saws
- Captures up to 99% of concrete dust
- Fits most 7 1/4" worm drive and hypoid circular saws
- Made of an ABS/Polycarbonate blend for rugged durability
- Wheels protect the cutting surface and glide smoothly
- Metal baseplate takes heavy jobsite abuse
- Complies with OSHA silica laws and EPA regulations for point-of-origin dust containment

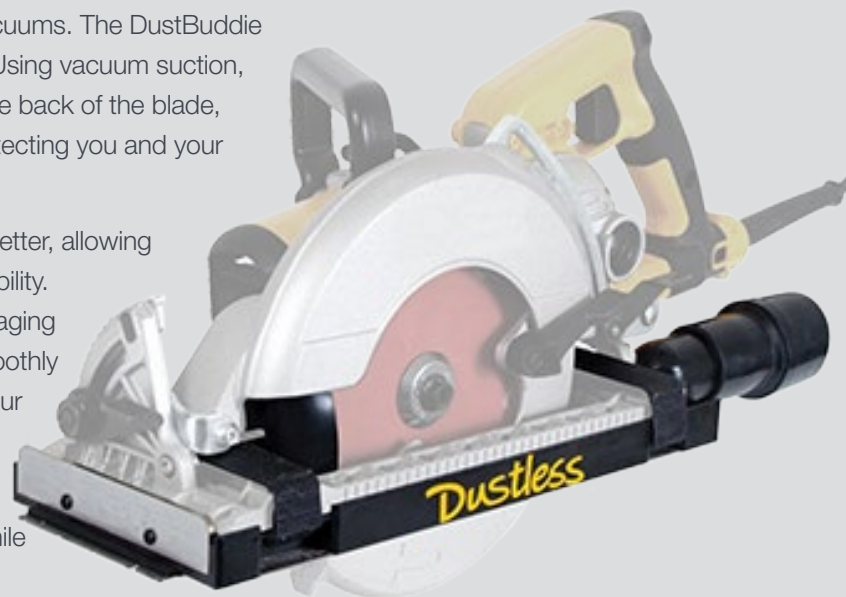

BITBUDDIE

Captures 99% of Dust: The BitBuddie captures nearly all dust generated while drilling. Using vacuum suction, the dust and debris are caught, giving you a truly dustless work environment. Protecting you and your workers from breathing harmful silica dust.

The BitBuddie uses vacuum suction to "stick" to whatever surface you are drilling, it can be used on concrete, wood, drywall, metal, and nearly any other material on ceilings, walls, floors, and any other surface.

Available as 1 3/8" BitBuddie works with any drill bit smaller than 1 3/8", including bit used to install alarms to masonry, paddle, or core bits. A 4" BitBuddie works with any drill bit 4" or smaller - just trim to fit your bit. Also an 8" BitBuddie works with any drill bit 8" or smaller - just trim to fit your bit. The shroud will adapt directly to 2.25" hard vacuum cuffs.

- Vacuum shroud used in dust containment while using drills and percussion hammers
- Captures up to 99% of concrete dust and slurry
- Works with any drill bit 1 3/8", 4", 8" or smaller
- Made of flexible rubber that sucks to any surface
- Complies with OSHA Silica Rule and EPA regulations for point-of-origin dust containment



DUSTBUBBLE

DustBubble collects drill dust saving you time and money by eliminating clean up

Available in:

- Regular Strength 250 and 500 packs
- Extra Strength: Sticks to wood, plaster and untreated surfaces for hands-free drilling 250 and 500 packs
- Industrial Strength: Sticks to metal and industrial applications for hands-free drilling 250 and 500 packs

- Transparent for optimal visibility
- Works in tight spaces or at an angle
- Heat resistant and durable
- Transparent, flexible & hands free
- Stick on, drill, throw away
- Complies with EPA regulations for point-of-origin dust containment



DUSTLESS SANDER

The Turbo Drywall Sander is vacuum powered. By hooking it up to a vacuum with 125 CFM or greater, you can sand dust free. The moving air inside creates an orbital sanding motion of 10,000 rotations per minute, moving the sandpaper on its own while capturing the dust in full.

The Turbo Drywall Sander captures nearly all dust generated while sawing. Using vacuum suction, the dust and debris are caught on all sides of the sander head, giving you a truly dustless work environment.

Working on drywall will take you from floor to ceiling. The Turbo Drywall Sander includes a 6' extension pole, allowing you to reach up into tight spaces.

- Powered by the suction of your vacuum
- Captures up to 99% of concrete dust
- Orbital head rotates at 10,000 rpm
- Adjustable head for different angles of sanding
- Adapts directly to 1.5" vacuum hoses using the included cuff
- Complies with EPA regulations for point-of-origin dust containment



CHIP BUDDIE

- Vacuums up paint chips as they are made
- Vacuum slots on both sides of scraper blade
- Excellent for popcorn ceiling removal
- Captures 98% of popcorn ceiling material as it is dislodged
- Save time and money associated with clean up after paint scraping
- Blade is 2.5" wide



MUDHEN

Concrete slurry water filtration never has been faster, or more reliable. The MudHen series of portable concrete slurry water systems has been designed for multiple modes of operation.

Available in 4 editions: Mini MudHen, MudHen 1, MudHen 2 and the MudHen MAX

The system can be used for any slurry water application. Specifically designed for the demanding world of concrete – options include pH adjustment, larger pumps, slab carts, and trailer mounts. The Mudhen is a portable, flexible machine for concrete slurry. The equipment can be configured and utilized in many ways. It can pull slurry water out of your containers, out of a pool, or any vessel. It can clean the water and put it to drain, or back into a container for reuse in your concrete equipment. Whatever your needs – wheel it into an elevator – or through a doorway into your work area. The system can be used just to clean a dumpster, pit, or water tank and recirculate the water until the vessel is clean.

The Mudhen series of portable concrete slurry water systems has been designed for processing any concrete slurry. In one step, the Mudhen filters, provides clean water to drain or for re-use, and compacts concrete sludge construction waste.

- Provides a simple-to-use-method for dealing with the slurry produced from wet processing of concrete.
- Eliminates the hassles and costs associated with storing, hauling, and treating concrete slurry
- Allows for inexpensive compliance with local, state, and federal clean water laws and ordinances
- For Eco-minded clients, it affords a marketing advantage over your competition

The Mudhen processes from 3 to 75 litres per minute of concrete slurry water; then stores up to 3.5 cubic feet of concrete sludge cake before the 10 minute cleaning cycle is required.

The Mudhen can out-pace most teams of concrete professionals who saw and grind with conventional industrial equipment.



SLURRY FILTER PRESS

Environmental protection in the construction sector is becoming increasingly important. Clients demand from service providers ecological answers regarding the disposal of sludge that results from concrete drilling and sawing. Added to this is the conservation of resources through reusability of the filtered cooling water. The chamber filter press meets the high requirements in a special way.

Advantages

- Easy handling of the function
- Clean working in a sensitive environment
- High flexibility due to compact design and low weight
- Robust chassis with pneumatic tires (suitable for construction sites)
- Dry sludge cake can be disposed of via building materials recycling




Technical Data	
Chamber Number	4 (Optional 5)
Chamber Volume	4.7 Kg (with 5 chambers 5.9L)
Air Pressure	6-7 bar
Recycling Capacity	up to 600 L/H
Press	47 Kg (without chambers)
Carriage	19 Kg
Weight	92 Kg (complete)
Dimensions	822 x 682 x 1155 mm (without handle)

K50 WSR WATER SLURRY RINGS

WSR Water Slurry Rings simply attach to any wet pick up vacuum cleaners, placed around a core bit where it adheres to all flat surfaces such as concrete, masonry, stone products and even asphalt. The rings are made from heavy duty clear rubberised plastics for durability and are clear so you can see the removal process easily

[Buy the WSR Water Slurry Rings Here](#)

WSR Water Slurry Rings
WSR100 - 100 mm
WSR150 - 150 mm
WSR200 - 200 mm
WSR250 - 250 mm
WSR300 - 300 mm
WSR350 - 350 mm

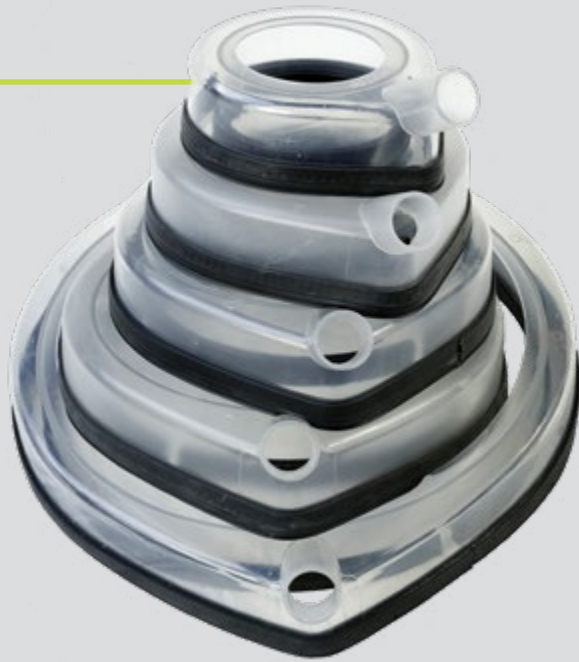

K50 WSR SEALING DISC

WSR Sealing discs are designed to be affixed to Water Slurry Rings with heavy duty mounting tape when drilling overhead. The seals create absolute protection with minimal effort.

Available in all sizes to suit the WSR Water Slurry rings.

[Buy the WSR Sealing Discs Here](#)



The Sealing Disc connects to the WSR using heavy duty mounting tape.